


Fișă tehnică | Număr articol: 870-410

Push-in type jumper bar; insulated; 10-way; Nominal current 18 A; light gray

www.wago.com/870-410

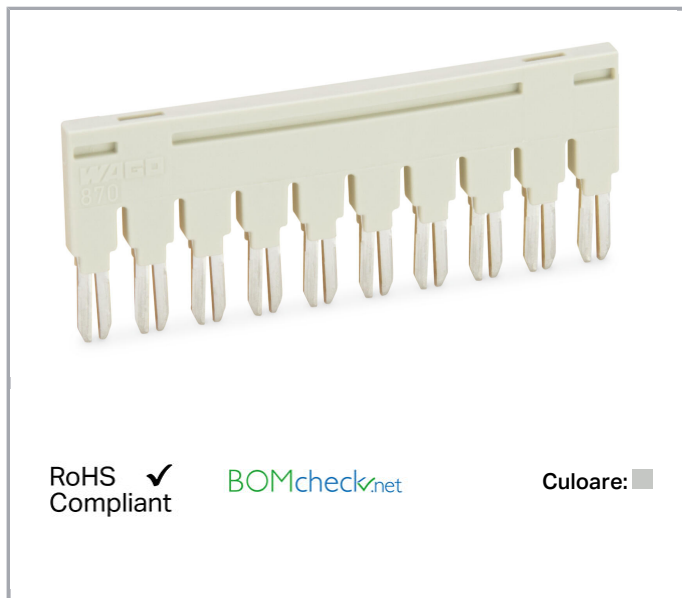

Date

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Approvals Ex

Rated current (Ex e II)	13,5 A
-------------------------	--------

Geometrical Data

Width	49 mm / 1.929 inch
Depth	2.5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0,047 MJ

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

Commercial data

Packaging type BOX

Counterpart

Descărcări

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 2,1 MB	Descărcare
------------------------	-------------	---------------	------------

CAD/CAE-Data

CAD data


2D/3D Models 870-410	URL	Descărcare
----------------------	-----	------------

CAE data

WSCAD Universe 870-410	URL	Descărcare
------------------------	-----	------------

Installation Notes

Jumpered

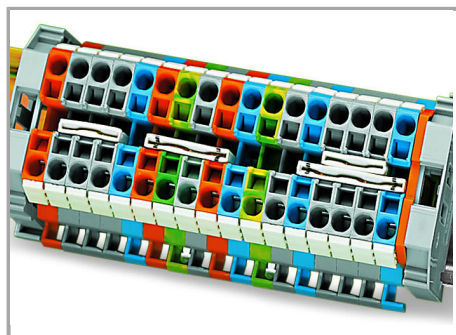

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Supus modificărilor.



Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Supus modificărilor.