

## Fișă tehnică | Număr articol: 870-405

Push-in type jumper bar; insulated; 5-way; Nominal current 18 A; light gray

[www.wago.com/870-405](http://www.wago.com/870-405)



### Date

#### Electrical data

#### Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

#### Approvals Ex

Rated current (Ex e II)	13,5 A
-------------------------	--------

#### Geometrical Data

Width	24 mm / 0.945 inch
-------	--------------------

Depth	2.5 mm / 0.098 inch
-------	---------------------

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



## Material Data

Color	light gray
Fire load	0,025 MJ
Weight	2,1 g

## Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918508162
Customs tariff number	85366990990

## Counterpart

### Descărcări

#### Documentation

##### Additional Information

Technical explanations	Apr 3, 2019	pdf 2,1 MB	Descărcare
------------------------	-------------	---------------	------------

## CAD/CAE-Data

### CAD data

2D/3D Models 870-405	URL	Descărcare
----------------------	-----	------------



### CAE data

WSCAD Universe 870-405	URL	Descărcare
------------------------	-----	------------

## Installation Notes

### Jumpered

Supus modificărilor.

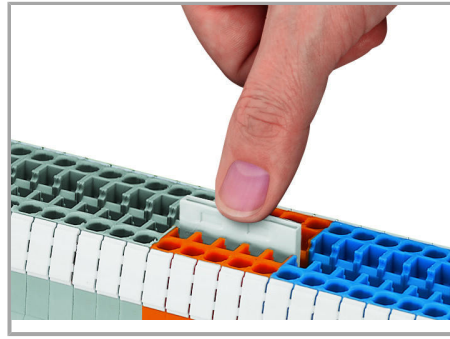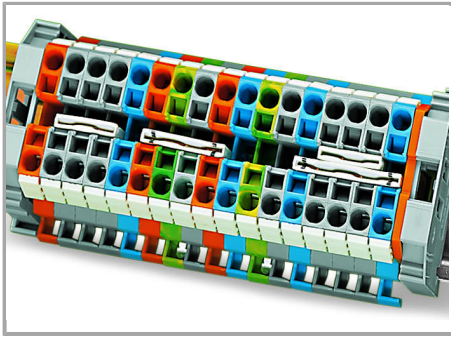

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or  
1 – – 4 – – 7

upon request

Supus modificărilor.