


RoHS Compliant

Culoare:

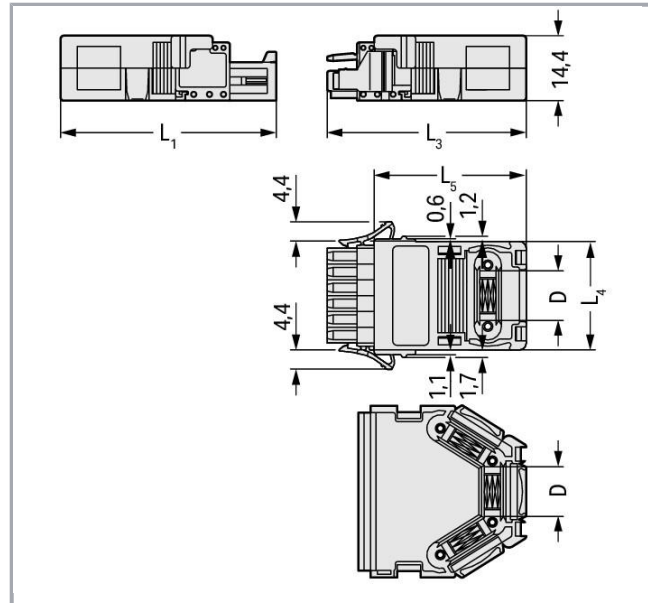

Descriere articol

- Suitable for cable clamp
- 1 x cable outlet, rear

Date

Electrical data

Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Approvals per UL 1059

Approvals per

UL 1059

Supus modificărilor.

Connection data

Pole No.	8
Number of connection types	1

Geometrical Data

Pin spacing	3.5 mm / 0.138 inch
Width	31 mm / 1.22 inch
Height	14.4 mm / 0.567 inch
Depth	33.7 mm / 1.327 inch

Mechanical data

Suitable	for 1-conductor male and female connectors
----------	--

Material Data


Color	light gray
Fire load	0,139 MJ
Weight	4,6 g

Commercial data

Product Group	3 (Multi Conn. System)
Packaging type	BOX
Country of origin	DE
GTIN	4017332589697
Customs tariff number	85389099990

Aprobări / certificate




Country specific Approvals

Emblemă	Aprobare	Text de aprobare suplimentar	Nume certificat
	CCA DEKRA Certification B.V.	EN 61984	2169534.02

Ship Approvals

Nume

Supus modificărilor.

Emblemă	Aprobare	Text de aprobare suplimentar	certificat
	ABS American Bureau of Shipping	-	19- HG1869876- PDA
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE000016Z
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Counterpart

Descărcări

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3,6 MB	Descărcare
------------------------	-------------	---------------	------------

CAD/CAE-Data

CAD data

2D/3D Models 734-608	URL	Descărcare
----------------------	-----	------------

CAE data

EPLAN Data Portal 734-608	URL	Descărcare
---------------------------	-----	------------


Installation Notes

Application

Supus modificărilor.


WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

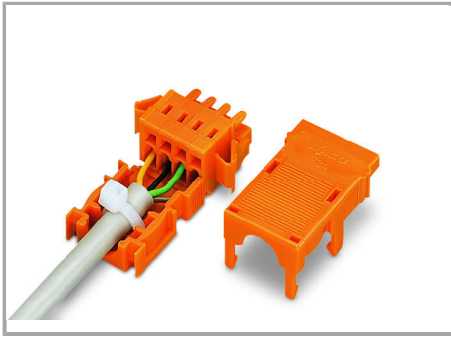

4-pole, 1-conductor female connector, with locking levers and strain relief housing (2- to 5-pole strain relief housing suitable only for cable ties)

Application

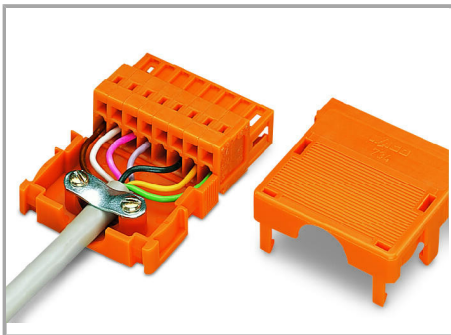

Strain relief housing for 734 Series Male and Female Connectors with CAGE CLAMP® connection.

Supus modificărilor.