

## Fișă tehnică | Număr articol: 243-113

Mounting carrier; for 6 connectors; 243 Series; for DIN-35 rail mounting /screw mounting; orange

[www.wago.com/243-113](http://www.wago.com/243-113)



### Descriere articol

#### Quick Fix Mounting

Finding that the MICRO PUSH WIRE® Connectors for Junction Boxes are ideal for DIN-rail-mount panel applications, electrical installers have requested the ability to use them in distribution panels. These connectors provide easy connections for smaller conductors used in low-current applications. They are well-suited to terminating telephone-style conductors for connecting alarms, bells, door sensors, communication systems and more.

The mounting carrier is WAGO's professional solution. It is available with mounting slots for 4 or 6 connectors.

Depending on the number of conductors, each mounting slot can accommodate a 4- or 8-conductor MICRO PUSH WIRE® Junction Box Connector. The connectors simply snap into the mounting slots and are removable, allowing conductors to be exchanged during changeover.

The carrier is designed for easy mounting directly to the DIN-35 rail, or to a panel, via the screw-mount flanges provided on both sides. A large marking area for direct marking with a permanent felt-tip pen or for pre-printed, self-adhesive marking strips is provided for clear circuit identification.

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.




**Date****Material Data**

Color	orange
Fire load	0,08 MJ
Weight	2,6 g

**Commercial data**

Product Group	7 (Push Wire Conn.)
Packaging type	BOX
Country of origin	DE
GTIN	4017332335492
Customs tariff number	39269097900


**Counterpart****Produse compatibile****General accessories**


	<b>Nr. articol: 243-144</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; transparent housing; light gray cover; Surrounding air temperature: max 60°C; transparent	<a href="http://www.wago.com/243-144">www.wago.com/243-144</a>
	<b>Nr. articol: 243-204</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; dark gray housing; light gray cover; Surrounding air temperature: max 60°C; 0,80 mm²; dark gray	<a href="http://www.wago.com/243-204">www.wago.com/243-204</a>
	<b>Nr. articol: 243-208</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; dark gray housing; light gray cover; Surrounding air temperature: max 60°C; dark gray	<a href="http://www.wago.com/243-208">www.wago.com/243-208</a>
	<b>Nr. articol: 243-304</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; light gray housing; light gray cover; Surrounding air temperature: max 60°C; light gray	<a href="http://www.wago.com/243-304">www.wago.com/243-304</a>
	<b>Nr. articol: 243-308</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray housing; light gray cover; Surrounding air temperature: max 60°C; light gray	<a href="http://www.wago.com/243-308">www.wago.com/243-308</a>
	<b>Nr. articol: 243-504</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; light gray cover; Surrounding air temperature: max 60°C; yellow	<a href="http://www.wago.com/243-504">www.wago.com/243-504</a>
	<b>Nr. articol: 243-508</b> MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray cover; Surrounding air temperature: max 60°C; yellow	<a href="http://www.wago.com/243-508">www.wago.com/243-508</a>

Supus modificărilor.


WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

	<p><b>Nr. articol: 243-804</b>                  MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; light gray cover; Surrounding air temperature: max 60°C; red</p>	<a href="http://www.wago.com/243-804">www.wago.com/243-804</a>
--	--	--

	<p><b>Nr. articol: 243-808</b>                  MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray cover; Surrounding air temperature: max 60°C; red</p>	<a href="http://www.wago.com/243-808">www.wago.com/243-808</a>
--	--	--

**Marking accessories**

	<p><b>Nr. articol: 210-833</b>                  Marking strips; on reel; 6 mm wide; plain; Self-adhesive; white</p>	<a href="http://www.wago.com/210-833">www.wago.com/210-833</a>
--	---	--

	<p><b>Nr. articol: 243-110</b>                  Marking strips; permanent adhesive; white</p>	<a href="http://www.wago.com/243-110">www.wago.com/243-110</a>
--	---	--

**Descărcări**

**Documentation**

**Additional Information**


Technical explanations	Apr 3, 2019	pdf 2,1 MB	Descărcare
------------------------	-------------	---------------	------------

**CAD/CAE-Data**


**CAE data**

WSCAD Universe 243-113	URL	Descărcare
------------------------	-----	------------

**Installation Notes**

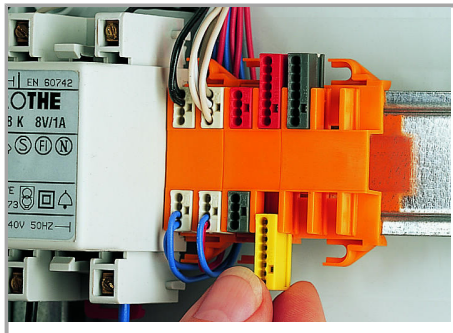


Inserting a MICRO junction box connector into the mounting carrier.

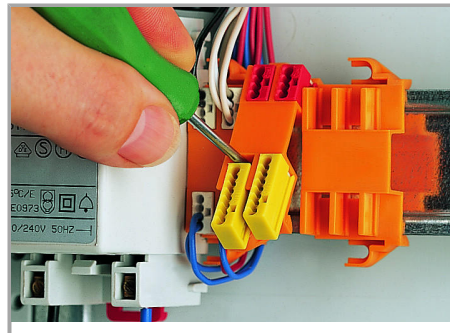


Removing a mounting carrier from the assembly.

Supus modificărilor.

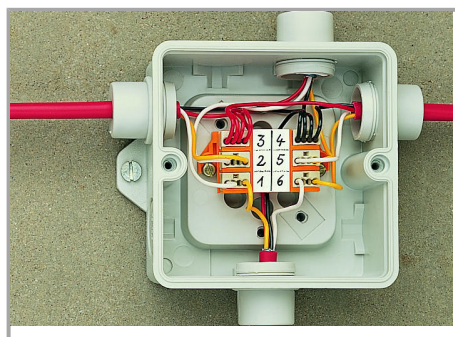


Typical application in a terminal box for burglar alarm

– screw-mounted carrier

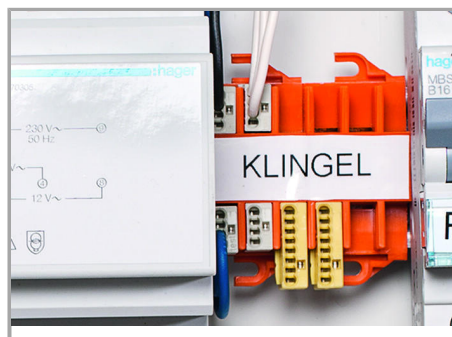

Example of a residential door bell application

– carriers mounted on a DIN-35 rail

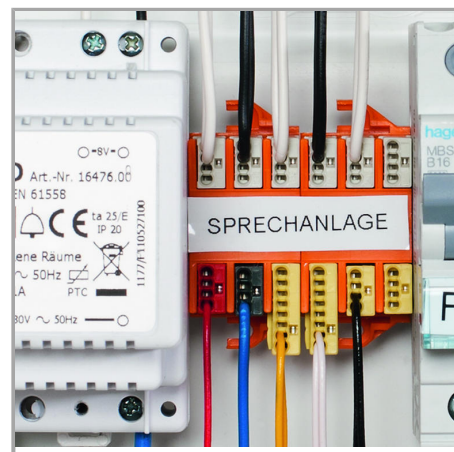

Example of a residential intercom application

Supus modificărilor.