


Fișă tehnică | Număr articol: 870-408

Push-in type jumper bar; insulated; 8-way; Nominal current 18 A; light gray

www.wago.com/870-408

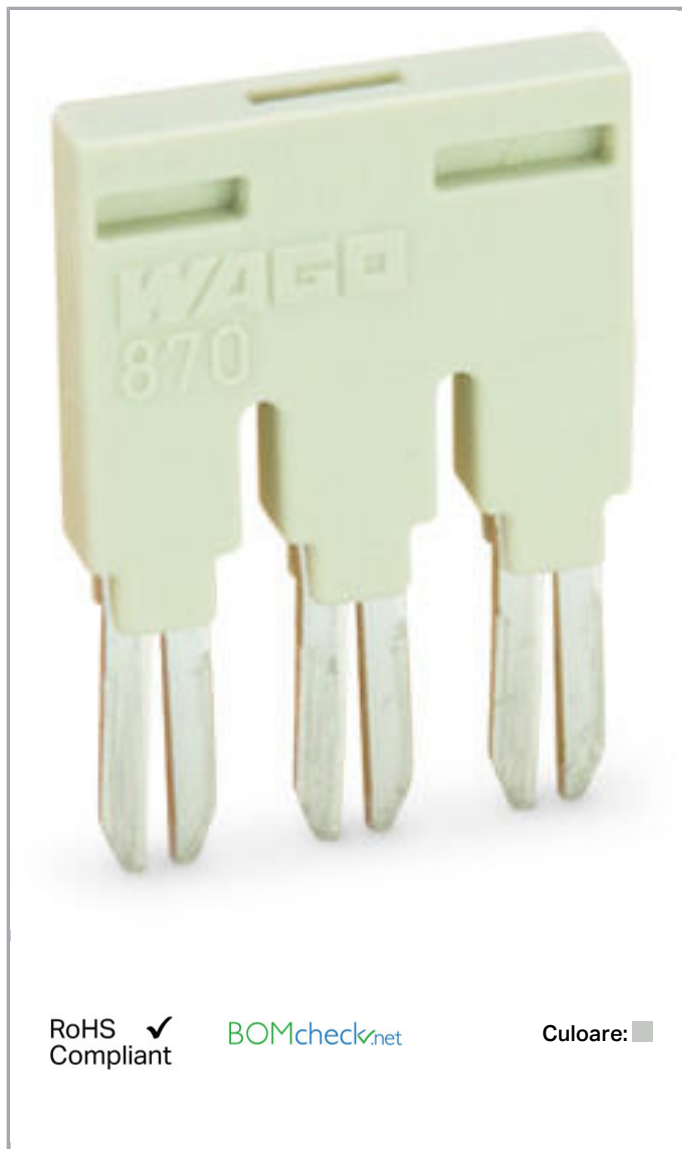

Date

Electrical data

Ratings per IEC/EN 60664-1

Rated current

18 A

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



Approvals Ex

Rated current (Ex e II)	13,5 A
-------------------------	--------

Geometrical Data

Width	39 mm / 1.535 inch
Depth	2.5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0,039 MJ
Weight	3,5 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918508407
Customs tariff number	85366990990

Counterpart

Descărcări Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 2,1 MB	Descărcare
------------------------	-------------	---------------	------------

CAD/CAE-Data

CAD data

2D/3D Models 870-408	URL	Descărcare
----------------------	-----	------------


CAE data

WSCAD Universe 870-408	URL	Descărcare
------------------------	-----	------------

Supus modificărilor.

Installation Notes

Jumpered

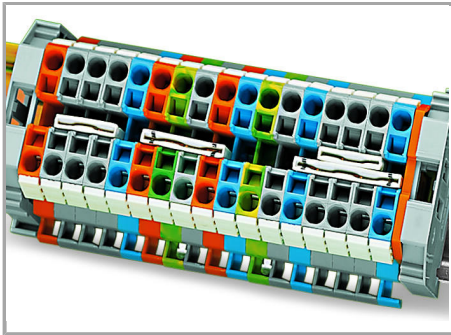

Commoning with push-in type jumper bars:

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Two parallel jumper slots are accommodated in one terminal block.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Supus modificărilor.