


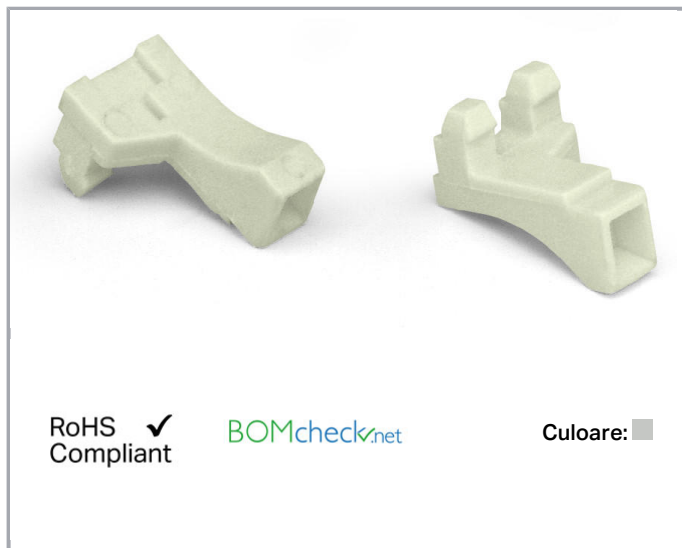

## Date

### Electrical data

### Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2)  $\triangleq$  Overvoltage category III / Pollution degree 2

### Approvals per UL 1059

Approvals per

UL 1059

### Connection data

Number of connection types

1

### Geometrical Data

Pin spacing

7.5/7.62 mm

### Mechanical data

Suitable

for male connector

Supus modificărilor.



## Material Data

|           |            |
|-----------|------------|
| Color     | light gray |
| Fire load | 0,006 MJ   |
| Weight    | 0,2 g      |

## Commercial data

|                       |                        |
|-----------------------|------------------------|
| Product Group         | 3 (Multi Conn. System) |
| Packaging type        | BOX                    |
| Country of origin     | DE                     |
| GTIN                  | 4017332117388          |
| Customs tariff number | 39269097900            |

## Aprobări / certificate

### Country specific Approvals

| Emblemă                                                                           | Aprobare                        | Text de aprobare suplimentar | Nume certificat |
|-----------------------------------------------------------------------------------|---------------------------------|------------------------------|-----------------|
|  | CSA<br>DEKRA Certification B.V. | C22.2                        | 1466354         |

### Ship Approvals

| Emblemă                                                                             | Aprobare              | Text de aprobare suplimentar | Nume certificat      |
|-------------------------------------------------------------------------------------|-----------------------|------------------------------|----------------------|
|  | LR<br>Lloyds Register | IEC 61984                    | 96<br>/20035<br>(E5) |

## Counterpart

## Descărcări

### Documentation

#### Additional Information

|                        |             |               |            |
|------------------------|-------------|---------------|------------|
| Technical explanations | Apr 3, 2019 | pdf<br>3,6 MB | Descărcare |
|------------------------|-------------|---------------|------------|

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## CAD/CAE-Data

### CAD data


2D/3D Models 231-130

[URL](#)

[Descărcare](#)

## Installation Notes

### Coding

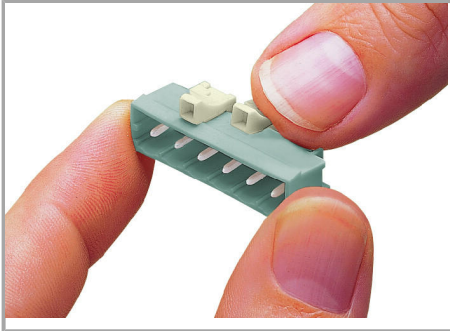

Coding a male header – fitting coding key(s).

Supus modificărilor.