

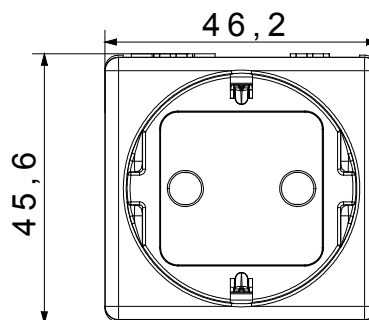


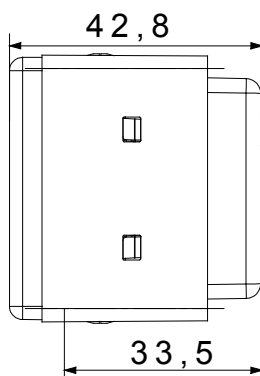

The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. Colour and finiture: glossy white, bright and versatile  
Ideal for flush-mounting solutions (for rectangular or square boxes), surface-mounting solutions, and for special applications. The range includes commands, socket- outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

|                                                         |                                 |                                                        |                                           |
|---------------------------------------------------------|---------------------------------|--------------------------------------------------------|-------------------------------------------|
| Categorie                                               | Priză                           | Descriere                                              | 2P+E - 16A                                |
| Culoare                                                 | Alb                             | Tensiune                                               | 250 V                                     |
| Groapă de pământ                                        | -                               | Standard                                               | Grade germane                             |
| Caracteristici                                          | Cu scuturi de siguranță         | Pentru știfturi de conectare                           | 4,8 mm                                    |
| Borne de cablare                                        | Conținut                        | Standard                                               | IEC 60884-1; UNE 20315-1-1; UNE 20315-1-2 |
| Rezistența la tensiunea de test                         | 2000 V la 50 Hz timp de 1 minut | Comutator de funcționare prelungit (nr. de modificări) | 10000 cicluri                             |
| Termo-presiune cu bilă                                  | 125 °C                          | Test de încercare cu fir incandescent                  | 850 °C                                    |
| Prinderea bornei la tracțiunea cablului                 | > 50 N                          | Capacitate de strângere borne cabluri torsadate (mm²)  | min. 0,75 - max. 2x4                      |
| Capacitate de strângere a bornelor cabluri solide (mm²) | min. 0,5 - max. 2x2,5           | Nr. Module DE SISTEM                                   | 2                                         |
| Material                                                | Tehnopolimer                    | Electrocod                                             | 0131                                      |

#### DIMENSIONAL



#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

