



C-Profile Type 2994

C-profile, slot width 22 mm, acc. to DIN EN 60715, unperforated

2994/6 BO

EAN Code: 4013339046409
Smallest packaging unit: 2 x 6 m
quantity unit: m M

the photorealistic images are to be considered as reference images

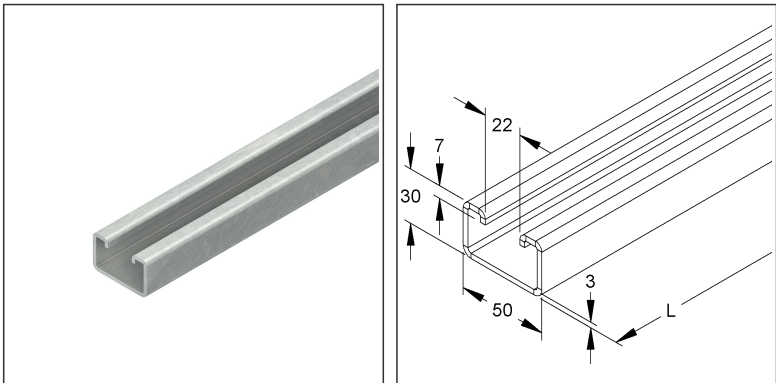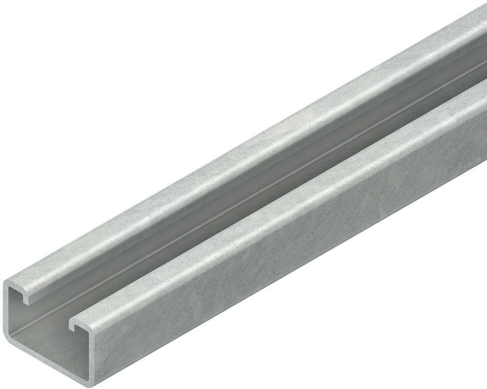

Article Description

C-profile, slot width 22 mm, 50x30x6000 mm, unperforated, steel, bare

Weight

Weight per quantity unit	2,984 kg / m
Weight in kg per 100	298 kg / 100m

Physical Article Dimensions

Height	30.00 mm
Width	50.00 mm
Depth/length	6000 mm

Additional Price Information

Article group	N05
quantity unit	m

Technical Datasheet

Niedax rails

2994/6 BO

the photorealistic images are to be considered as reference images

Packing Dimension

12 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	70.00 mm	Height	40.00 mm
Gross weight	36 kg	Volume	0,017 m³		
Min. quantity	12.00 m	Max. Quantity	12.00 m		

Tender Text

C-profile model 2994, unperforated.
Suitable U-clamps (BU... and BUK...).

In personal danger zones the protective cap SKC 2994 must be fitted.
To ensure that the protective cap can be fitted without problems, a distance of at least 50 mm from the profile end must be kept free.

Dimensions (approx.)
Height H x width W x material thickness t : 30 x 50 x 3 mm
Slot width : 22 mm
Delivery length L : 6000 mm
Material : steel, bright
NIEDAX Model No. : 2994/6 BO
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098