

9 | STERILE ROOM LIGHTING




SHIELD-G 600



Color Options



Housing	Electrostatic coated steel sheet
Glass	Clear tempered glass
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

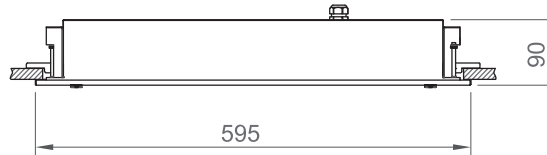

Order Code	W	Lm	CCT	CRI	WxL	Cut-out (mm)	Kg
02125.66.30.029	28	2900	3000	Ra>80	595x595	580x580	7,3
02125.66.30.032	33	3200	3000	Ra>80	595x595	580x580	7,3
02125.66.30.035	35	3500	3000	Ra>80	595x595	580x580	7,3
02125.66.40.030	28	3000	4000	Ra>80	595x595	580x580	7,3
02125.66.40.032	33	3300	4000	Ra>80	595x595	580x580	7,3
02125.66.40.036	35	3600	4000	Ra>80	595x595	580x580	7,3





SHIELD-G 1200



Color Options



Housing	Electrostatic coated steel sheet
Glass	Clear tempered glass
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

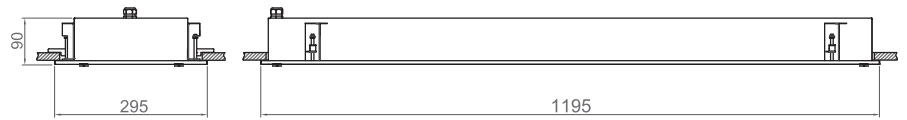

Order Code	W	Lm	CCT	CRI	WxL	Cut-out (mm)	Kg
02125.31.30.029	33	2900	3000	Ra>80	295x1195	280x1180	7,5
02125.31.30.040	52	4000	3000	Ra>80	295x1195	280x1180	7,5
02125.31.40.030	33	3000	4000	Ra>80	295x1195	280x1180	7,5
02125.31.40.041	52	4100	4000	Ra>80	295x1195	280x1180	7,5





EVEN-G 600



Color Options





Housing	Electrostatic coated steel sheet
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

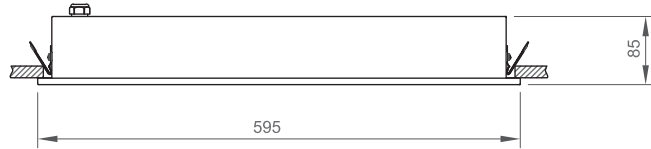

Order Code	W	Lm	CCT	CRI	WxL	Cut-out (mm)	Kg
02142.66.30.033	28	3300	3000	Ra>80	595x595	580x580	3,1
02142.66.30.036	33	3600	3000	Ra>80	595x595	580x580	3,1
02142.66.40.034	28	3400	4000	Ra>80	595x595	580x580	3,1
02142.66.40.037	33	3700	4000	Ra>80	595x595	580x580	3,1

**Color Options**

Housing	Electrostatic coated steel sheet
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

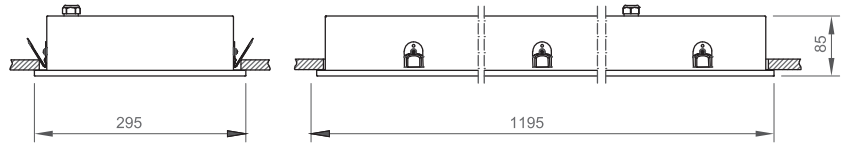

Order Code	W	Lm	CCT	CRI	WxL	Cut-out (mm)	Kg
02142.31.30.032	33	3200	3000	Ra>80	295x1195	280x1180	3,5
02142.31.30.040	52	4400	3000	Ra>80	295x1195	280x1180	3,5
02142.31.40.033	33	3300	4000	Ra>80	295x1195	280x1180	3,5
02142.31.40.041	52	4500	4000	Ra>80	295x1195	280x1180	3,5

WINK-G



Color Options




Ral 9016




Ral 9006



Ral 9005



Housing	Electrostatic coated steel sheet
Glass	Clear tempered glass
Optics	Opal lens and electrostatic coated perforated steel reflector with electrostatic coated steel sheet on the back
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

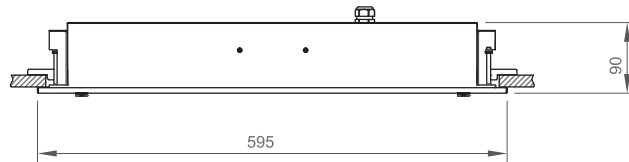

Order Code	W	Lm	CCT	CRI	WxL	Cut-out (mm)	Kg
02141.66.30.024	32	2400	3000	Ra>80	595x595	580x580	6,1
02141.66.30.047	60	4700	3000	Ra>80	595x595	580x580	6,1
02141.66.40.025	32	2500	4000	Ra>80	595x595	580x580	6,1
02141.66.40.048	60	4800	4000	Ra>80	595x595	580x580	6,1

**Color Options**

Ral 9016





Ral 9006



Ral 9005

Housing	Electrostatic coated steel sheet
Glass	Clear tempered glass
Optics	Highly transmissive opal diffuser
Light Source	High efficacy Mid Power LED with lifetime L80B50 > 50,000h
Driver	Constant current output, Pf>0.90
Supply Voltage	220-240V/50-60Hz
Ambient Temperature	-20C°/+40C°
Options	Dali 3 hour emergency lighting kit

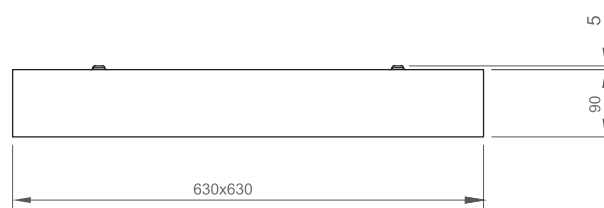

Order Code	W	Lm	CCT	CRI	Kg
04101.66.30.029	28	2900	3000	Ra>80	7,5
04101.66.30.033	33	3200	3000	Ra>80	7,5
04101.66.30.035	35	3500	3000	Ra>80	7,5
04101.66.40.030	28	3000	4000	Ra>80	7,5
04101.66.40.032	33	3300	4000	Ra>80	7,5
04101.66.40.036	35	3600	4000	Ra>80	7,5