


## SPECIFICATIONS

Standard	NEMA 23
Step angle	$1.8^{\circ} \pm 5\%$
Current / Phase	3.0A
Voltage / Phase	3.9V
Phase No.	2
Resistance	$1.3 \pm 10\% \Omega$
Insulation resistance	100M $\Omega$ m (500V DC)
Inductance	$2.2 \pm 20\%$ mH
Insulation class	B
Holding torque	15kgf.cm

## DIAGRAM

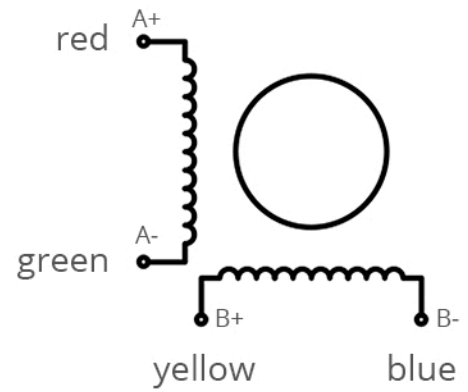

## DIMENSIONS

UNIT: mm

