


ROCK GRIP IND4 (ECH)

TIRE SIZE	16.00 - 25
UM	IS STANDARD
CONSTRUCTION	❖ BIAS
MACHINERY	MOVIMENTADOR PARA CONTENTORES VAZIOS
VERSÃO	PORT INDUSTRIAL
TIRE TYPE	TL

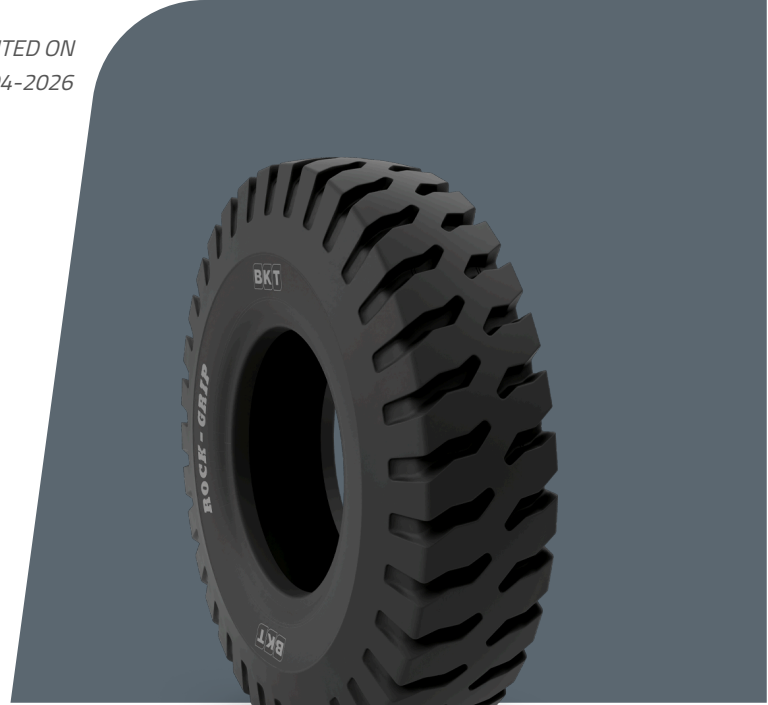

DIMENSÕES IS STANDARD

OD (MM)	1525	RIM ALT	13.00/2.0
SLR (MM)	699	PR	32
RC (MM)	4514	TRA CODE	IND4
RIM REC	11.25/2.0		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	10.00
10	16875

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.