

AGRIMAX FORCE



AGRIMAX FORCE
RADIAL 1F TECHNOLOGY TIRES

AGRIMAX FORCE



AGRIMAX FORCE the high-end product of BKT is a radial tire specially designed for soil tillage, haulage and harvesting applications with high-power tractors and harvesters. ensuring top performance and efficiency. Thanks to its IF technology, this tire can carry heavy loads with a lower inflating pressure compared to a standard tire reducing soil compaction. AGRIMAX FORCE features a reinforced bead and provides enhanced traction, top self-cleaning properties and fuel economy.



	SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	23.7	61.1	27.3	183.2	725	STD
	IF 710/55 R 28 CFO	165 D	DW 25 B	-	28.2	58.8	26.1	174.9	700	STD
Ø30"	IF 620/75 R 30 CFO	169 D	DW 23 B	DW 21 B	25.6	67.0	29.9	200.8	800	STD
	IF 600/70 R 30 CFO	165 D	DW 21 B DW 21 A	DW 20 A DW 20 B	23.7	63.1	27.9	189.0	750	SPL
	IF 710/55 R 30 CFO	166 D	DW 25 B	-	28.2	60.8	27.0	181.7	725	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES		
				
				

Permissible tolerances: 0.0. 2%-S.W. 2%-RC 2.5%-LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION
		REC RIM	ALT RIM						
									
IF 600/70 R 30 CFO	165 D	DW 21 B DW 21 A	DW 20 A DW 20 B	23.7	63.1	27.9	189.0	750	STD
IF 710/60 R 30 CFO	168 D	DW 25 B	-	27.9	63.5	28.1	189.5	775	STD
Ø34"	IF 710/60 R 34 CFO	DW 25 B	-	27.9	67.6	30.0	201.8	825	SPL
	IF 710/75 R 34 CFO	DW 25 B	DW 23 B	28.2	75.9	34.3	227.4	900	STD
	IF 650/60 R 34	DW 23 B	DW 21 B	25.6	64.7	29.4	195.0	775	STD
	IF 650/65 R 34 CFO	DW 23 B	DW 20 B	25.6	67.3	30.1	199.9	825	SPL
	IF 600/70 R 34	DW 21 B DW 21 A	DW 20 A DW 20 B	23.7	67.1	29.8	199.6	800	STD
	IF 650/65 R 34 CFO	DW 23 B	DW 20 B	25.6	67.3	30.1	199.9	825	STD
	IF 710/55 R 34 CFO	DW 25 B	-	28.2	64.8	29.4	195.4	775	STD
	IF 710/60 R 34 CFO	DW 25 B	-	27.9	67.6	30.0	201.8	825	STD

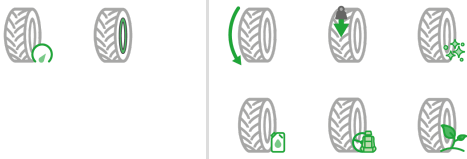
STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			

Permissible tolerances: 0.0. 2%-S.W. 2%-RC 2.5%-LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

	SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø38"	IF 420/85 R 38	155 D	DW 14 L	DW 15 L	16.5	65.7	30.7	197.5	800	STD
	IF 650/85 R 38 CFO	179 D	DW 23 B	DW 20 B DW 21 B	26.1	81.5	36.5	240.4	975	STD
	IF 800/70 R 38 CFO	184 D	DW 27 B	DW 25 B DW 28 B DW 30 B	31.3	82.1	36.3	243.5	975	STD
	IF 900/60 R 38 CFO	184 D	DW 30 A DW 30 B	TW 31 B	36.1	80.5	35.6	240.4	975	STD
	IF 650/65 R 38 CFO	169 D	DW 23 B	-	25.6	72.0	32.7	216.9	875	STD
	IF 650/75 R 38 CFO	175 D	DW 23 B	DW 21 B	25.6	76.4	34.1	228.4	925	SPL
	IF 380/80 R 38	149 D	W 12	W 11 W 13	15.0	61.9	28.5	188.7	750	STD
	IF 650/75 R 38 CFO	175 D	DW 23 B	DW 21 B	25.6	76.4	34.1	228.4	925	STD
	IF 710/60 R 38	172 D	DW 25 B	-	27.9	71.5	32.0	212.8	875	STD
Ø42"	IF 900/60 R 42 CFO	186 D	DW 30 B	TW 30 B	36.1	84.5	37.4	252.6	1025	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index
			

SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION	
		REC RIM	ALT RIM							
										
IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	28.2	84.0	38.1	252.1	1000	STD	
IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	28.2	81.1	36.2	242.8	975	STD	
IF 800/70 R 42 CFO	192 D	DW 27 B	DW 25 B DW 28 B DW 30 B	31.3	84.6	37.4	252.0	1025	STD	
IF 800/70 R 42 CFO	186 D	DW 27 B	DW 25 B DW 28 B DW 30 B	31.3	84.6	37.4	252.0	1025	STD	
IF 650/85 R 42 CFO	180 D	DW 23 B	-	25.6	85.6	38.0	252.0	1025	STD	
IF 900/50 R 42 CFO	180 D	DW 30 B	TW 30 B	34.7	77.0	34.3	229.5	950	STD	
IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	28.2	84.0	38.1	252.1	1000	SPL	
IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	28.2	81.1	36.2	242.8	975	SPL	
Ø46"	IF 750/75 R 46 CFO	186 D	DW 25 B	-	29.2	90.3	40.6	267.8	1075	STD
Ø50"	IF 480/95 R 50	170 D	DW 16 B	-	18.9	85.4	39.4	258.8	1025	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			Permissible tolerances: 0.0. 2%—S.W. 2%—RC 2.5%—LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index