


# LG RIB

**20X10.00 - 10**

<b>UM</b>	US STANDARD
<b>CONSTRUCTION</b>	BIAS
<b>MACHINERY</b>	BIÇME MAKINELERİ / KÜÇÜK TRAKTÖR / TRAKTÖR
<b>VERSION</b>	STANDARD
<b>TIRE TYPE</b>	TL

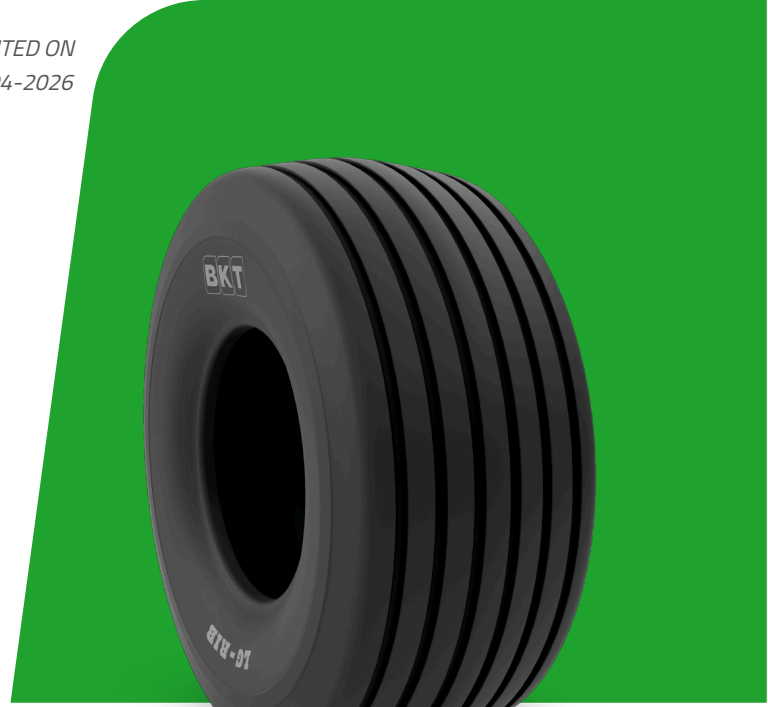

## UNDEFINED US STANDARD

<b>USA CODE</b>	94026128	<b>RC (IN)</b>	56.9
<b>SW (IN)</b>	9.3	<b>RIM REC</b>	8.00   - 55;   - 70;   - 90
<b>OD (IN)</b>	19.6	<b>RIM ALT</b>	7.00   - 55;   - 70;   - 90
<b>SLR (IN)</b>	8.7	<b>ECE</b>	E11-106R-003469

## LOAD CAPACITY (LBS/TIRE)

<b>MPH / PSI</b>	<b>22</b>
10	1170

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.