


RIB IMPLEMENT (A)

TIRE SIZE	10.0/80 - 12
UM	US STANDARD
CONSTRUCTION	❖ BIAS
MACHINERY	OUTILLAGE AGRICOLE / REMORQUE / OUTILLAGE AGRICOLE
VERSION	STANDARD
TIRE TYPE	TL
LI/SS FREE ROLLING	110 A8

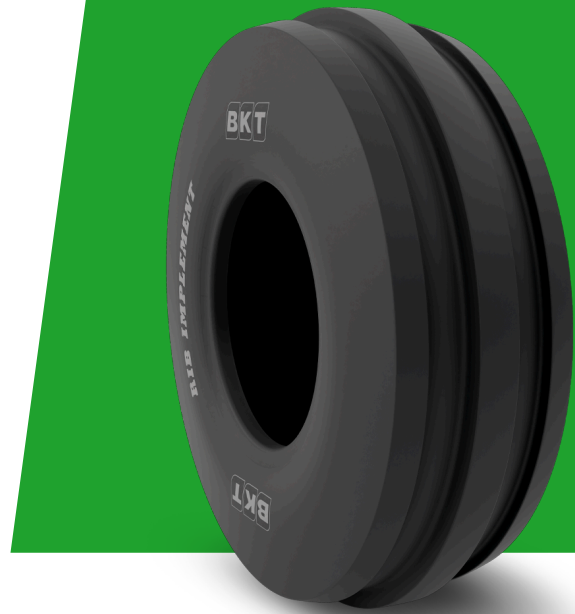

DIMENSIONS US STANDARD

CODE USA	94010868	RC (IN)	86.1
SW (IN)	10.4	RIM REC	9.00
OD (IN)	29.4	RIM ALT	7.0
SLR (IN)	13.0	ECE	E11-106R-003533

LOAD CAPACITY (LBS/TIRE)

MPH / PSI	33
5 FR	3270
15 FR	2780
20 FR	2610
25 FR	2340

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.