


SM 54 SUPER IND-4S

| | |
|--------------|--------------------|
| TIRE SIZE | 18.00 - 25 |
| UM | IS STANDARD |
| CONSTRUCTION | BIAS |
| MACHINERY | GRÚA REACH STACKER |
| VERSIÓN | INDUSTRIAL |
| TIRE TYPE | TL |

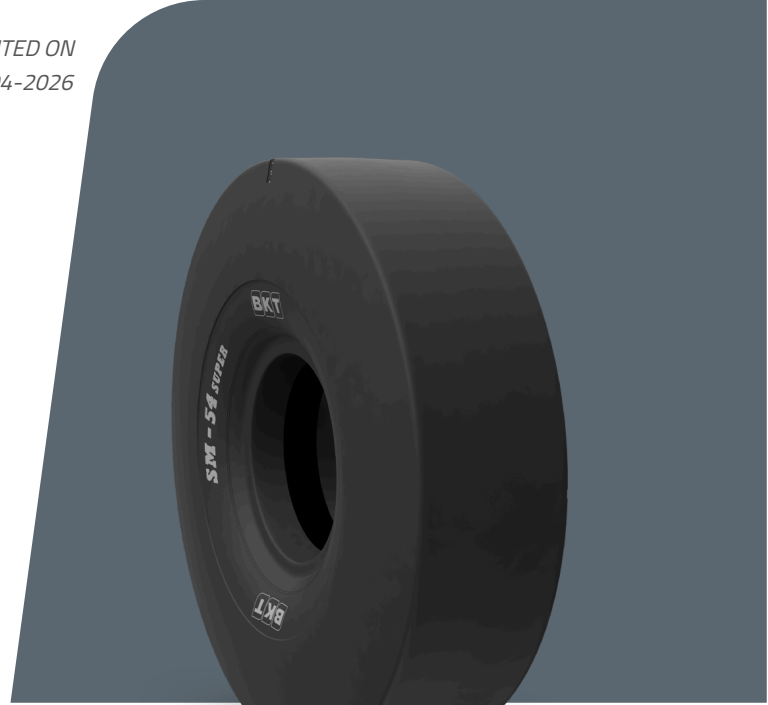

DIMENSIONES IS STANDARD

| | | | |
|----------|-----------|----------|-----------|
| OD (MM) | 1671 | RIM ALT | 15.00/2.5 |
| SLR (MM) | 759 | PR | 40 |
| RC (MM) | 5040 | TRA CODE | IND-4S |
| RIM REC | 13.00/2.5 | | |

LOAD CAPACITY (KG/TIRE)

| | |
|------------|-------|
| KM/H / BAR | 10.00 |
| 10 | 22950 |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.