

AGRIMAX FORCE



AGRIMAX FORCE
RADIAL 1F TECHNOLOGY TIRES

AGRIMAX FORCE



AGRIMAX FORCE the high-end product of BKT is a radial tire specially designed for soil tillage, haulage and harvesting applications with high-power tractors and harvesters. ensuring top performance and efficiency. Thanks to its IF technology, this tire can carry heavy loads with a lower inflating pressure compared to a standard tire reducing soil compaction. AGRIMAX FORCE features a reinforced bead and provides enhanced traction, top self-cleaning properties and fuel economy.



	SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	23.7	61.1	27.3	183.2	725	STD
	IF 710/55 R 28 CFO	165 D	DW 25 B	-	28.2	58.8	26.1	174.9	700	STD
Ø30"	IF 620/75 R 30 CFO	169 D	DW 23 B	DW 21 B	25.6	67.0	29.9	200.8	800	STD
	IF 600/70 R 30 CFO	165 D	DW 21 B DW 21 A	DW 20 A DW 20 B	23.7	63.1	27.9	189.0	750	SPL
	IF 710/55 R 30 CFO	166 D	DW 25 B	-	28.2	60.8	27.0	181.7	725	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES		
				
				

Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference, SRI index

SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION
		REC RIM	ALT RIM						
									
IF 600/70 R 30 CFO	165 D	DW 21 B DW 21 A	DW 20 A DW 20 B	23.7	63.1	27.9	189.0	750	STD
IF 710/60 R 30 CFO	168 D	DW 25 B	-	27.9	63.5	28.1	189.5	775	STD
Ø34"	IF 710/60 R 34 CFO	DW 25 B	-	27.9	67.6	30.0	201.8	825	SPL
	IF 710/75 R 34 CFO	DW 25 B	DW 23 B	28.2	75.9	34.3	227.4	900	STD
	IF 650/60 R 34	DW 23 B	DW 21 B	25.6	64.7	29.4	195.0	775	STD
	IF 650/65 R 34 CFO	DW 23 B	DW 20 B	25.6	67.3	30.1	199.9	825	SPL
	IF 600/70 R 34	DW 21 B DW 21 A	DW 20 A DW 20 B	23.7	67.1	29.8	199.6	800	STD
	IF 650/65 R 34 CFO	DW 23 B	DW 20 B	25.6	67.3	30.1	199.9	825	STD
	IF 710/55 R 34 CFO	DW 25 B	-	28.2	64.8	29.4	195.4	775	STD
	IF 710/60 R 34 CFO	DW 25 B	-	27.9	67.6	30.0	201.8	825	STD

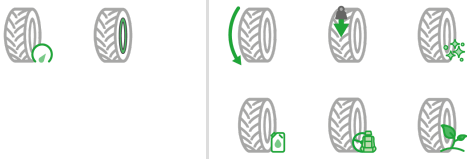
STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			

Permissible tolerances: 0.0. 2%—S.W. 2%—RC 2.5%—LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index

	SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø38"	IF 420/85 R 38	155 D	DW 14 L	DW 15 L	16.5	65.7	30.7	197.5	800	STD
	IF 650/85 R 38 CFO	179 D	DW 23 B	DW 20 B DW 21 B	26.1	81.5	36.5	240.4	975	STD
	IF 800/70 R 38 CFO	184 D	DW 27 B	DW 25 B DW 28 B DW 30 B	31.3	82.1	36.3	243.5	975	STD
	IF 900/60 R 38 CFO	184 D	DW 30 A DW 30 B	TW 31 B	36.1	80.5	35.6	240.4	975	STD
	IF 650/65 R 38 CFO	169 D	DW 23 B	-	25.6	72.0	32.7	216.9	875	STD
	IF 650/75 R 38 CFO	175 D	DW 23 B	DW 21 B	25.6	76.4	34.1	228.4	925	SPL
	IF 380/80 R 38	149 D	W 12	W 11 W 13	15.0	61.9	28.5	188.7	750	STD
	IF 650/75 R 38 CFO	175 D	DW 23 B	DW 21 B	25.6	76.4	34.1	228.4	925	STD
	IF 710/60 R 38	172 D	DW 25 B	-	27.9	71.5	32.0	212.8	875	STD
Ø42"	IF 900/60 R 42 CFO	186 D	DW 30 B	TW 30 B	36.1	84.5	37.4	252.6	1025	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index
			

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Baikrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

US – 15/07/2026

SIZE	LI/SS	RIM		SW (in)	OD (in)	SLR (in)	RC (in)	SRI index	VERSION	
		REC RIM	ALT RIM							
										
IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	28.2	84.0	38.1	252.1	1000	STD	
IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	28.2	81.1	36.2	242.8	975	STD	
IF 800/70 R 42 CFO	192 D	DW 27 B	DW 25 B DW 28 B DW 30 B	31.3	84.6	37.4	252.0	1025	STD	
IF 800/70 R 42 CFO	186 D	DW 27 B	DW 25 B DW 28 B DW 30 B	31.3	84.6	37.4	252.0	1025	STD	
IF 650/85 R 42 CFO	180 D	DW 23 B	-	25.6	85.6	38.0	252.0	1025	STD	
IF 900/50 R 42 CFO	180 D	DW 30 B	TW 30 B	34.7	77.0	34.3	229.5	950	STD	
IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	28.2	84.0	38.1	252.1	1000	SPL	
IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	28.2	81.1	36.2	242.8	975	SPL	
Ø46"	IF 750/75 R 46 CFO	186 D	DW 25 B	-	29.2	90.3	40.6	267.8	1075	STD
Ø50"	IF 480/95 R 50	170 D	DW 16 B	-	18.9	85.4	39.4	258.8	1025	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			Permissible tolerances: 0.0. 2%—S.W. 2%—RC 2.5%—LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Baikrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

US – 15/07/2026