


# FLOTATION RIB 774

<b>TIRE SIZE</b>	<b>600/55 - 22.5</b>
<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	❖ BIAS
<b>MACHINERY</b>	MAȘINĂ DE RECOLTARE / REMORCĂ / MAȘINĂ DE RECOLTARE / MAȘINI DE IMPLEMENTARE
<b>VERSION</b>	STANDARD
<b>TIRE TYPE</b>	TL
<b>LI/SS FREE ROLLING</b>	164 A8/160 B

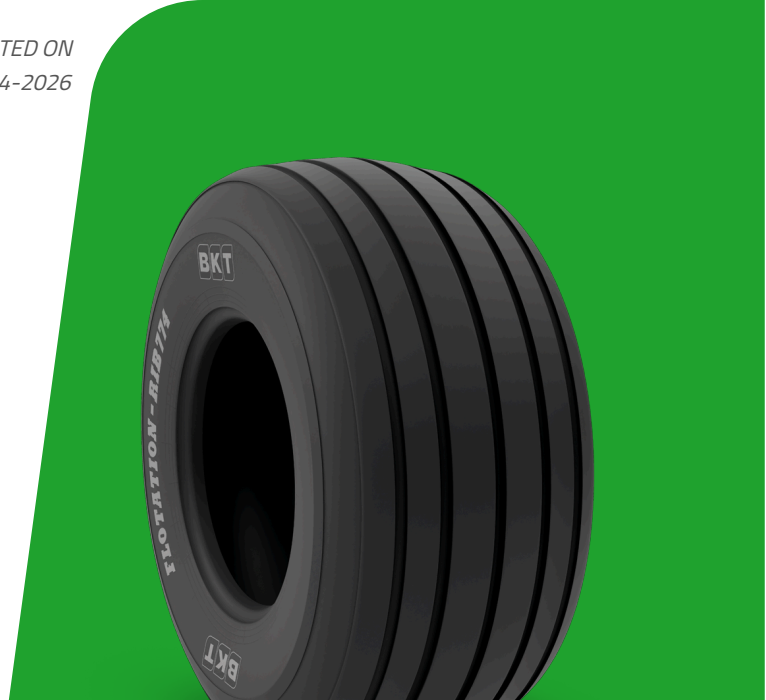

## DIMENSIUNI IS STANDARD

<b>SW (MM)</b>	600	<b>RIM REC</b>	AG 20.00
<b>OD (MM)</b>	1230	<b>ECE</b>	E11-106R-005943
<b>SLR (MM)</b>	540	<b>PR</b>	12
<b>RC (MM)</b>	3716		

## LOAD CAPACITY (KG/TIRE)

KM/H / BAR	1.50	1.70	2.00
10 FR	5915	6365	7000
20 FR	5325	5725	6300
30 FR	4730	5090	5600
40 FR	4225	4545	5000
50 FR	3805	4090	4500

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.