


# LG SMOOTH

TIRE SIZE	16X6.50 - 8
UM	IS STANDARD
CONSTRUCTION	BIAS
MACHINERY	ÅKGRÄSKLIPPARE / LITEN TRAKTOR / TRAKTOR
VERSION	ARAMID BELTED
TIRE TYPE	TL

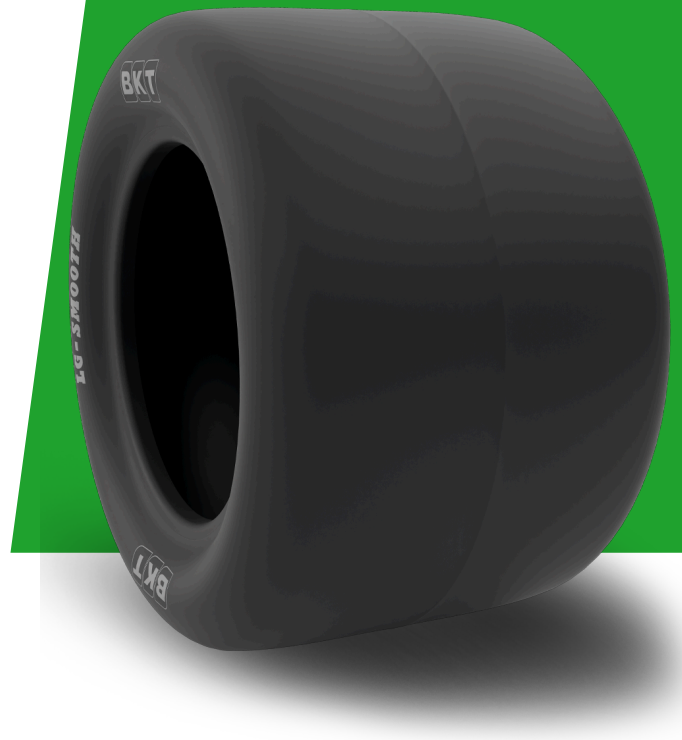

## DIMENSIONER IS STANDARD

SW (MM)	160
OD (MM)	400
RIM REC	5.375 I - 55; I - 70; I - 90
PR	10

## LOAD CAPACITY (KG/TIRE)

KM/H / BAR	4.90
15	470

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.