




IS standard



GROWING TOGETHER

AS 507

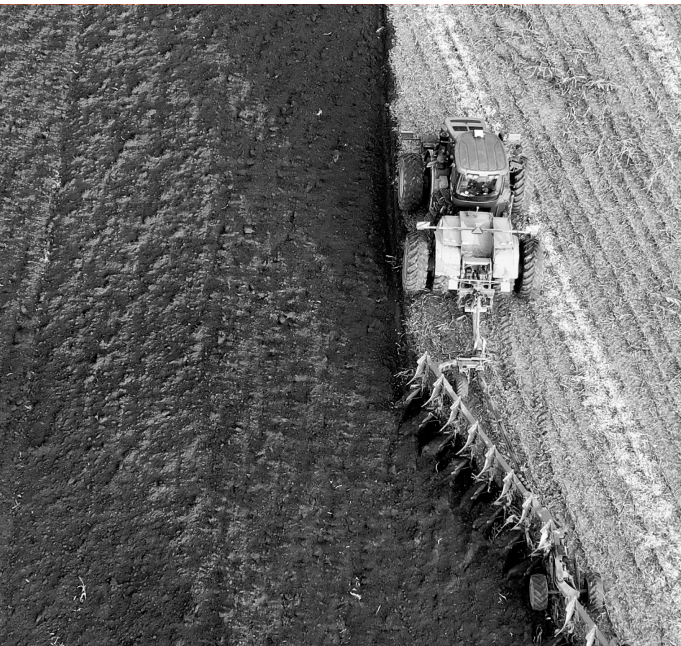

PRODUCT DATA SHEET



Bias



AS 507



AS 507 is suitable for soil tillage with trailers and implement machinery. It features excellent self-cleaning properties and increased traction on the ground.

Performance



Durability



Self-Cleaning



Traction

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS	
		Rec.	Alt.								DW	FR
Ø 15"	185/65 - 15	5½ J	-	185	640	301	1894	STD	4	TL	76 A8	89 A8

STD: Standard



Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference; DW = Drive Wheel; FR = Free Rolling