


# SM 48 (GK)

<b>TYRE SIZE</b>	11X7.10 -5
<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	☒ BIAS
<b>MACHINERY</b>	GO-KART
<b>VERSION</b>	STANDARD
<b>TL/TT</b>	TL

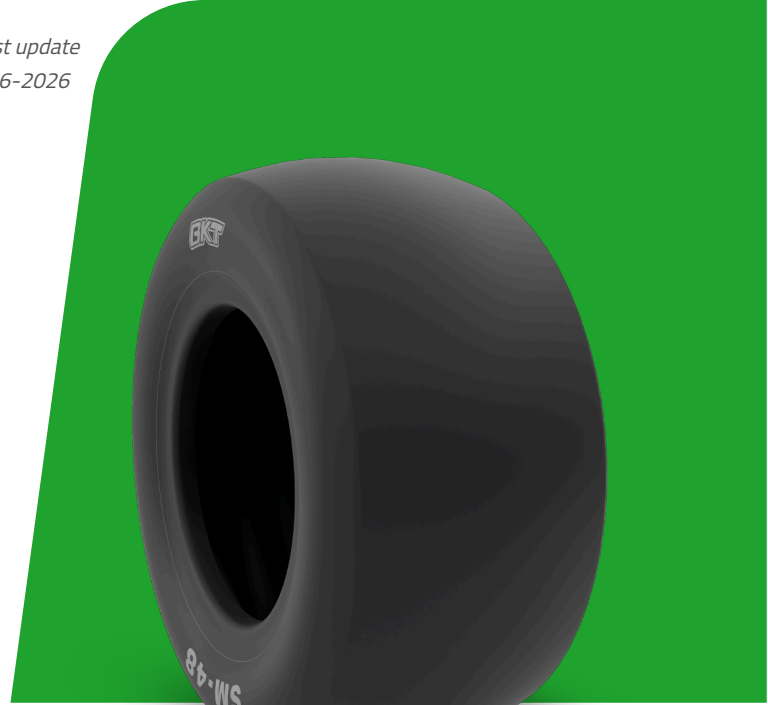

## DIMENSIONS IS STANDARD

<b>SW (MM)</b>	190	<b>RIM REC</b>	6.75
<b>OD (MM)</b>	295		
<b>SLR (MM)</b>	0		
<b>RC (MM)</b>	0		

## LOAD CAPACITY (KG/TYRE)

<b>KM/H / BAR</b>	4.00
-	135

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.