


# CONTAINER KING

|                     |  |
|---------------------|--|
| <b>TYRE SIZE</b>    | <b>12.00 - 24</b>  |
| <b>UM</b>           | IS STANDARD  |
| <b>CONSTRUCTION</b> |  BIAS |
| <b>VERSION</b>      | INDUSTRIAL   |
| <b>TYRE TYPE</b>    | TT   |

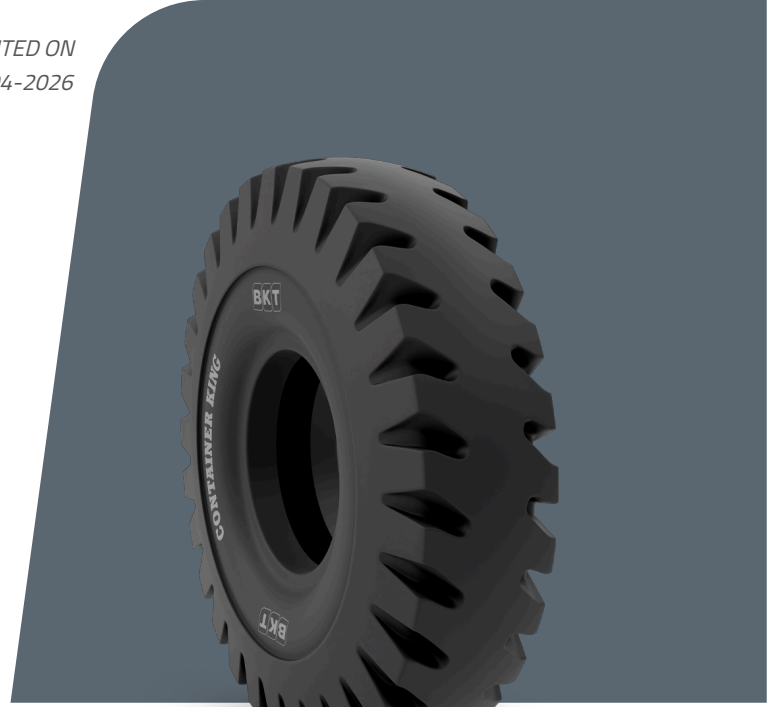

## DIMENSIONS IS STANDARD

|                |      |                 |      |
|----------------|------|-----------------|------|
| <b>OD (MM)</b> | 1285 | <b>TRA CODE</b> | IND4 |
| <b>RIM REC</b> | 8.5  |                 |      |
| <b>RIM ALT</b> | 8.0  |                 |      |
| <b>PR</b>      | 24   |                 |      |

## LOAD CAPACITY (KG/TYRE)

|                   |              |
|-------------------|--------------|
| <b>KM/H / BAR</b> | <b>10.00</b> |
| 10                | 10270        |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.