


# SM 48 (GK)

|                     |             |
|---------------------|-------------|
| <b>TIRE SIZE</b>    | 10X4.5 -5   |
| <b>UM</b>           | IS STANDARD |
| <b>CONSTRUCTION</b> |             |
| <b>MACHINERY</b>    | GO-KART     |
| <b>VERSION</b>      | STANDARD    |
| <b>TL/TT</b>        | TL          |

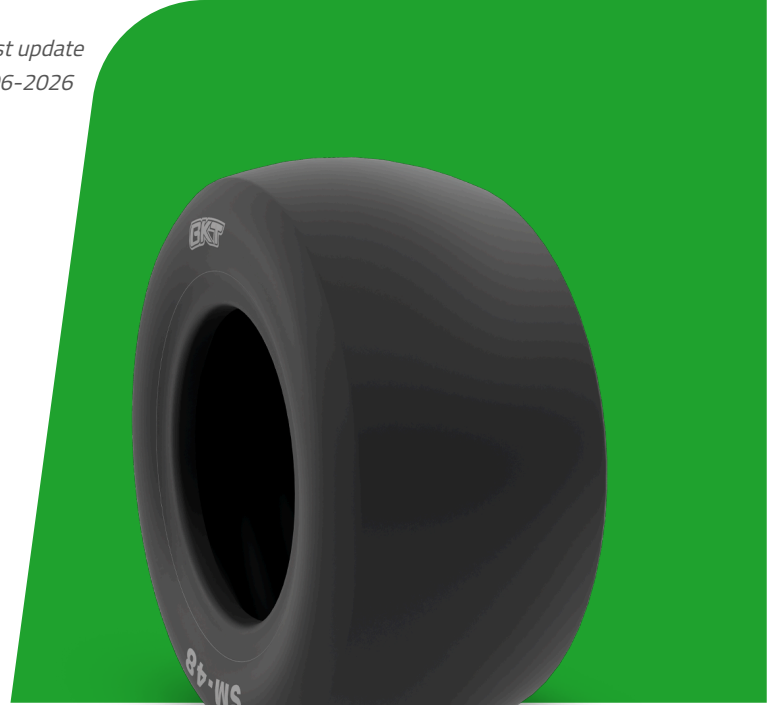

## DIMENSIONS IS STANDARD

|                 |     |                |     |
|-----------------|-----|----------------|-----|
| <b>SW (MM)</b>  | 130 | <b>RIM REC</b> | 4.5 |
| <b>OD (MM)</b>  | 260 |                |     |
| <b>SLR (MM)</b> | 0   |                |     |
| <b>RC (MM)</b>  | 0   |                |     |

## LOAD CAPACITY (KG/TIRE)

|                   |             |
|-------------------|-------------|
| <b>KM/H / BAR</b> | <b>4.00</b> |
| -                 | 130         |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.