


# POWER TRAX HD SMOOTH

<b>TIRE SIZE</b>	12.00 - 20
<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	❖ BIAS
<b>MACHINERY</b>	CONTAINERSTAPLER / GABELSTAPLER
<b>VERSION</b>	STANDARD
<b>TIRE TYPE</b>	TT

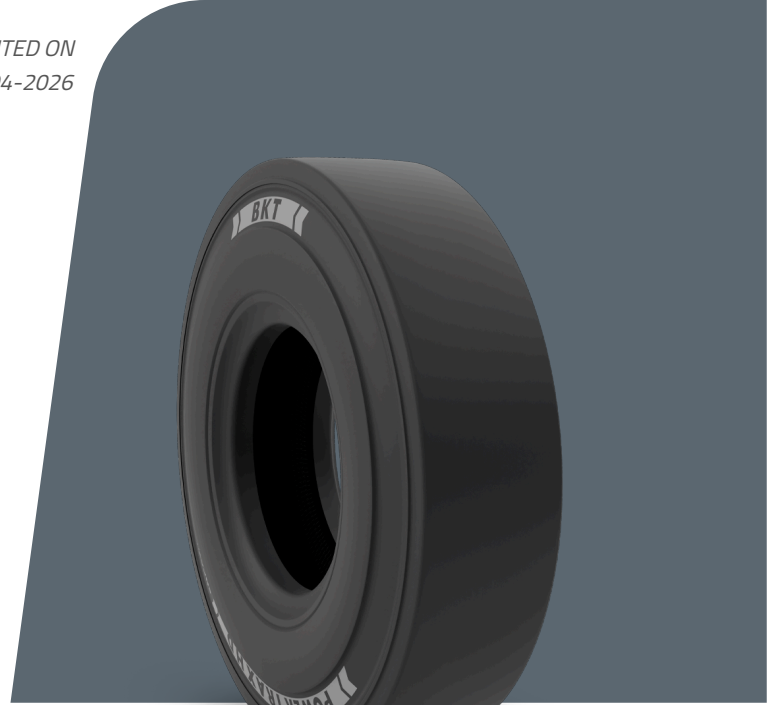

## ABMESSUNGEN IS STANDARD

<b>SW (MM)</b>	320	<b>ECE</b>	E11-106R-005561
<b>OD (MM)</b>	1150	<b>PR</b>	20
<b>RIM REC</b>	8.50		
<b>RIM ALT</b>	9.0		

## LOAD CAPACITY (KG/TIRE)

KM/H / BAR	10.00
25 LOAD WHEEL	9230
25 STEER WHEEL	7100
10 OTHER VEHICLES	9230
25 OTHER VEHICLES	7100
STATIC SIDE LOADER	10720

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.