




US standard



GROWING TOGETHER

TR 117

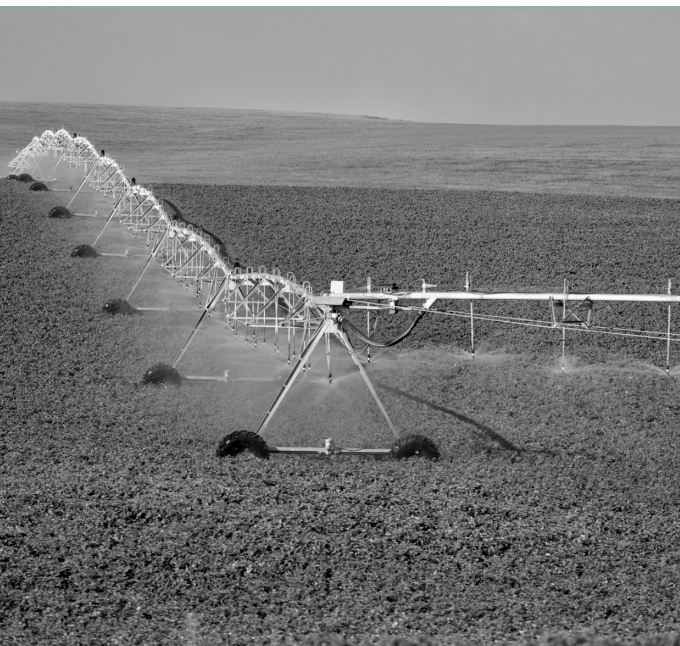

PRODUCT DATA SHEET



Bias



Performance



TR 117

TR 117 is ideal for irrigation applications with pivot irrigators. Its specially designed tread pattern provides excellent traction and outstanding self-cleaning properties.

	US CODE	Tire size	RIM		S.W. (In.)	O.D. (In.)	SLR (In.)	RC (In.)	TREAD DEPTH (32nds)	TIRE WEIGHT (lbs)	Version	PR	Type	LI/SS
			Rec.	Alt.										
Ø 24"	94028498	11.2 - 24	W 10	W 9	11.2	42.9	20.0	126.2	32	58	STD	4	TT	98A8
	94029044	11.2 - 24	W 10	W 9	11.2	42.9	20.0	126.2	32	63	STD	4	TL	98A8
	94028368	11.2 - 24	W 10	W 9	11.2	42.9	20.0	126.2	32	60	STD	6	TT	106A8
	94029082	11.2 - 24	W 10	W 9	11.2	42.9	20.0	126.2	32	64	STD	6	TL	106A8
	94046805	13.6 - 24	W 12	W 11	13.8	46.7	21.3	141.4	33	87	STD	6	TT	115A8
	94047406	13.6 - 24	W 12	W 11	13.8	46.7	21.3	141.4	33	96	STD	6	TL	115A8
	94048410	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	122	HD	8	TL	124A8
	94002993	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	98	STD	4	TT	109A8
	94029051	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	107	STD	4	TL	109A8
	94003006	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	99	STD	6	TT	119A8
	94003013	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	108	STD	6	TL	119A8
	94003020	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	99	STD	8	TT	124A8
	94031429	14.9 - 24	W 13	W 11 ; W 12	14.9	49.0	22.6	144.1	35	108	STD	8	TL	124A8
Ø 38"	94028801	11.2 - 38	W 10	W 9	11.2	56.9	26.6	173.2	32	88	STD	4	TT	106A8

STD: Standard - HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference



Bias



Performance



	US CODE	Tire size	RIM		S.W. (In.)	O.D. (In.)	SLR (In.)	RC (In.)	TREAD DEPTH (32nds)	TIRE WEIGHT (lbs)	Version	PR	Type	LI/SS
			Rec.	Alt.										
Ø 38"	94030408	11.2 - 38	W 10	W 9	11.2	56.9	26.6	173.2	32	91	STD	4	TL	106A8
	94030415	11.2 - 38	W 10	W 9	11.2	56.9	26.6	173.2	32	89	STD	6	TT	113A8
	94031368	11.2 - 38	W 10	W 9	11.2	56.9	26.6	173.2	32	93	STD	6	TL	113A8

STD: Standard



Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference