


LG SMOOTH

TIRE SIZE	16X6.50 - 8
UM	IS STANDARD
CONSTRUCTION	BIAS
MACHINERY	MAQUINA DE CORTAR RELVA / TRATOR PEQUENO / TRATOR
VERSÃO	ARAMID BELTED
TIRE TYPE	TL

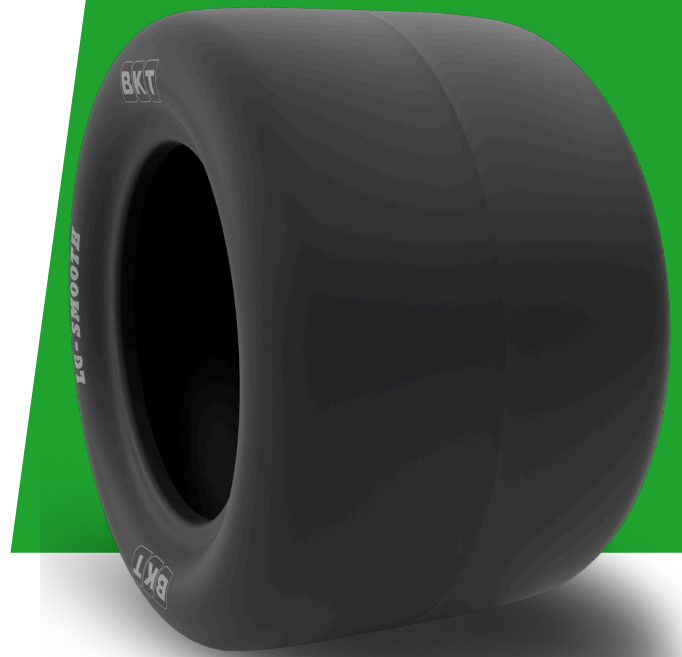

DIMENSÕES IS STANDARD

SW (MM)	160
OD (MM)	400
RIM REC	5.375 - 55; - 70; - 90
PR	10

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	4.90
15	470

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.