


# SM 48 (GK)

|           |             |
|-----------|-------------|
| TIRE SIZE | 11X7.10 -5  |
| UM        | IS STANDARD |
| MACHINERY | GOKART      |
| VERSION   | STANDARD    |
| TIRE TYPE | TL          |

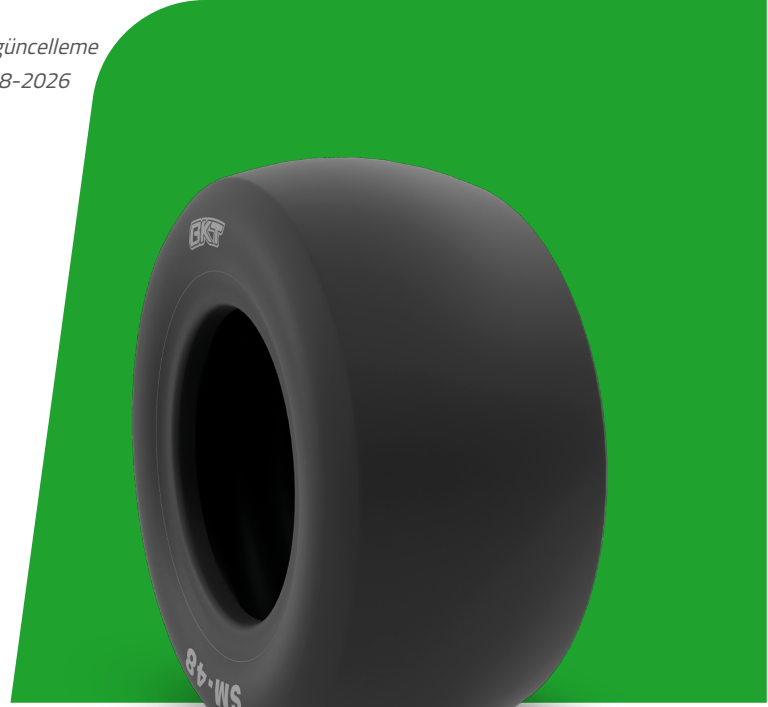

## BOYUTLAR IS STANDARD

|          |     |                  |      |
|----------|-----|------------------|------|
| SW (MM)  | 190 | RC (MM)          | 0    |
| OD (MM)  | 295 | RIM REC          | 6.75 |
| SLR (MM) | 0   | TREAD DEPTH (MM) | 5    |

## LOAD CAPACITY (KG/TIRE)

|            |      |
|------------|------|
| KM/H / BAR | 4.00 |
| -          | 135  |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.