


# FLOTATION RIB 774

<b>TIRE SIZE</b>	550/60 - 22.5
<b>UM</b>	US STANDARD
<b>CONSTRUCTION</b>	❖ BIAS
<b>MACHINERY</b>	HAY HARVESTER / TRAILER / HARVESTER / IMPLEMENTS
<b>VERSION</b>	STANDARD
<b>TIRE TYPE</b>	TL
<b>LI/SS FREE ROLLING</b>	167 A8/163 B

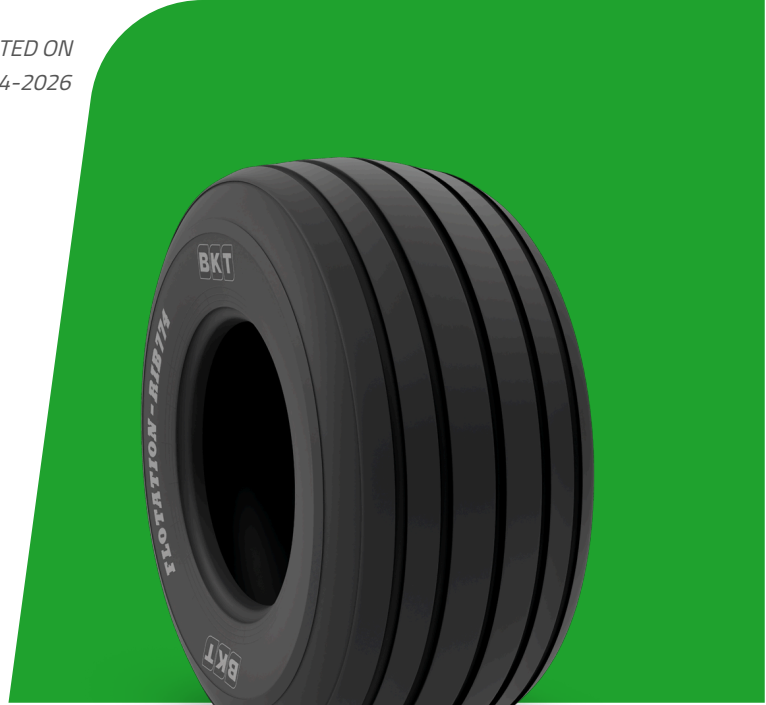

## DIMENSIONS US STANDARD

<b>USA CODE</b>	94006618	<b>RC (IN)</b>	146.7
<b>SW (IN)</b>	21.7	<b>RIM REC</b>	AG 16.00
<b>OD (IN)</b>	48.8	<b>ECE</b>	E11-106R-005942
<b>SLR (IN)</b>	21.3	<b>PR</b>	16

## LOAD CAPACITY (LBS/TIRE)

MPH / PSI	35	38	41
5 FR	15370	16110	16820
10 FR	13830	14490	15130
20 FR	12300	12890	13460
25 FR	10980	11510	12010
30 FR	9880	10360	10750

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.