


FLOTATION RIB 774

TIRE SIZE	600/55 - 22.5
UM	US STANDARD
CONSTRUCTION	⊠ BIAS
MACHINERY	КОМБАЙН / ПРИЦЕП / КОМБАЙН / СЕЛЬСКОХОЗЯЙСТВЕННОЕ ОБОРУДОВАНИЕ
VERSION	STANDARD
TIRE TYPE	TL
LI/SS FREE ROLLING	169 A8/166 B

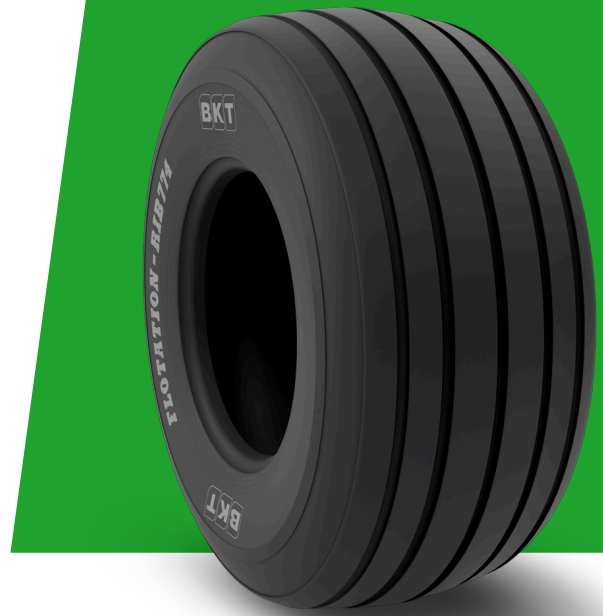

РАЗМЕРЫ US STANDARD

USA CODE	94006632	RC (IN)	146.3
SW (IN)	23.6	RIM REC	AG 20.00
OD (IN)	48.4	ECE	E11-106R-005944
SLR (IN)	21.3	PR	16

LOAD CAPACITY (LBS/TIRE)

MPH / PSI	32	35	38
5 FR	16240	17080	17900
10 FR	14620	15380	16110
20 FR	12980	13670	14320
25 FR	11600	12200	12790
30 FR	10440	10980	11680

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.