


EARTHMAX SR 22 AS

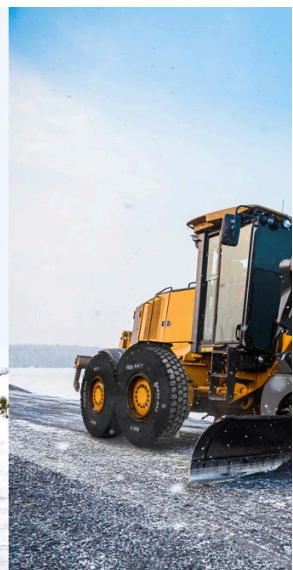

EARTHMAX
RADIAL OTR TIRES

EARTHMAX SR 22 AS

EARTHMAX SR 22 AS (E-2**/G-2*/L-2**) is an All Steel radial tyre specially designed for graders, small loaders and trucks operating on ice and snow ensuring also optimum performance in all-season conditions. Made of unique winter compounds, it provides superior braking performance in icy or snowy conditions and avoids stone trapping during all-season usage. The low void ratio and wide footprint of EARTHMAX SR 22 AS stand for excellent traction and stability with even wear, and a long tread life.



	SIZE	TT/TL	TRA CODE	STAR RATING	LI/SS	RIM		TKPH (TK/H)	OW (MM) (mm)	OD (mm)	SLR (mm)	RC (mm)	TREAD DEPTH (MM)	VERSION
						REC RIM	ALT RIM							
														
Ø24"	14.00 R 24	TL	G2/L2	*	153 A8 175 A2	8.00 TG	10.00 VA 9.00 GR	0	390	1370	625	4141	25	CR
Ø25"	23.5 R 25	TL	E2/G2/L2	**/*/**	185 B 170 A8 201 A2	19.50/2.5	-	0	610	1614	709	4863	33,5	CR
	17.5 R 25	TL	E2/G2/L2	**/*/**	167 B 153 A8 182 A2	14.00/1.5	-	0	445	1350	595	4010	28	CR
	20.5 R 25	TL	E2/G2/L2	**/*/**	177 B 161 A8 193 A2	17.00/2.0	-	0	532	1493	641	4324	32	CR

CR: CUT RESISTANT COMPOUND

TECHNOLOGIES			PERFORMANCES			
						
						

Permissible tolerances: O.O. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tyre width O.O. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Balakrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

GB – 23/09/2026



TECHNOLOGIES		PERFORMANCES
  E2/G2/L2		   
 B	 201 kg	

Permissible tolerances: O.O. 2%-S.W. 2%-RC 2.5%-LI/SS load/speed index, S.W. tyre width O.O. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Balakrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

GB – 23/09/2026