




PRINTED ON  
21-04-2026

DATA SHEET

# SM 54 SUPER IND-4S

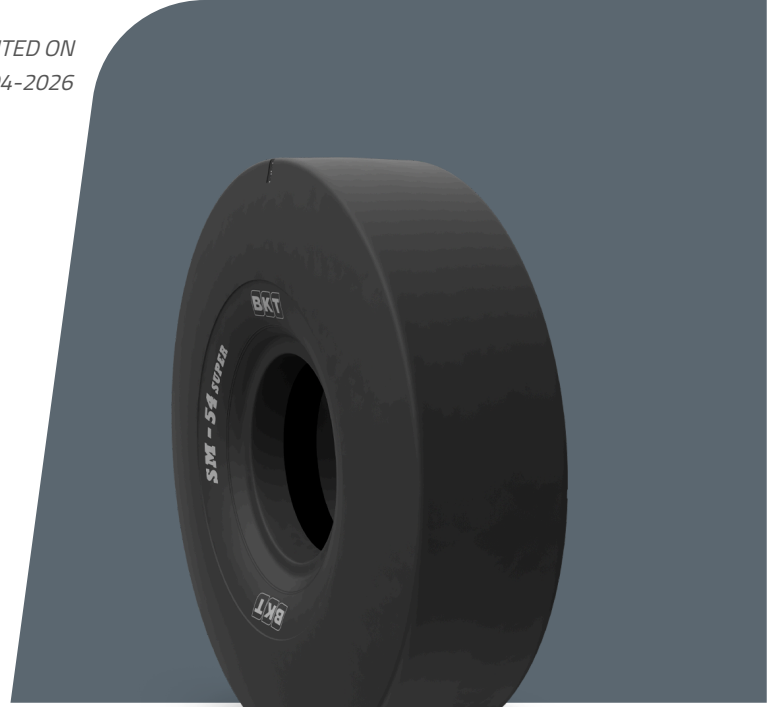

<b>TIRE SIZE</b>	<b>18.00 - 25</b>
<b>UM</b>	US STANDARD
<b>CONSTRUCTION</b>	⊠ BIAS
<b>MACHINERY</b>	REACH STACKER
<b>VERSION</b>	INDUSTRIAL
<b>TIRE TYPE</b>	TL

## DIMENSIONS US STANDARD

<b>CODE USA</b>	94074099	<b>RIM REC</b>	13.00/2.5
<b>OD (IN)</b>	65.8	<b>RIM ALT</b>	15.00/2.5
<b>SLR (IN)</b>	29.9	<b>PR</b>	40
<b>RC (IN)</b>	198.4	<b>TRA CODE</b>	IND-4S

## LOAD CAPACITY (LBS/TIRE)

<b>MPH / PSI</b>	<b>145</b>
5	50600

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.