


SM 48 (GK)

TIRE SIZE	10X4.5 -5
UM	IS STANDARD
MACHINERY	GO-KART
VERSION	STANDARD
TL/TT	TL

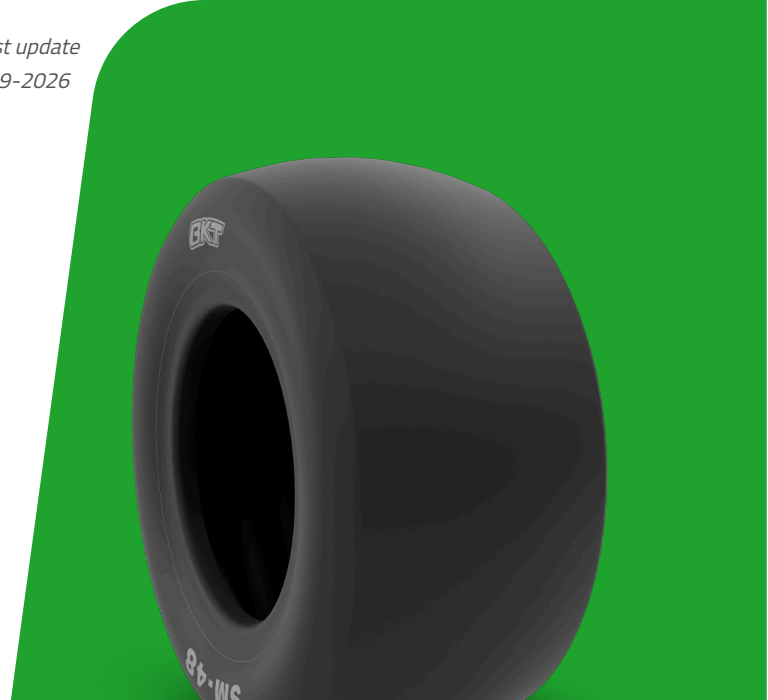

DIMENSIONS IS STANDARD

SW (MM)	130	RC (MM)	0
OD (MM)	260	RIM REC	4.5
SLR (MM)	0	TREAD DEPTH (MM)	5,5

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	4.00
-	130

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.