


# FLOTATION RIB 774

<b>TIRE SIZE</b>	550/60 - 22.5
<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	❖ BIAS
<b>MACHINERY</b>	COSECHADORA / REMOLQUE / COSECHADORA / MAQUINARIA AGRÍCOLA
<b>VERSIÓN</b>	STANDARD
<b>TIRE TYPE</b>	TL
<b>LI/SS FREE ROLLING</b>	160 A8/156 B

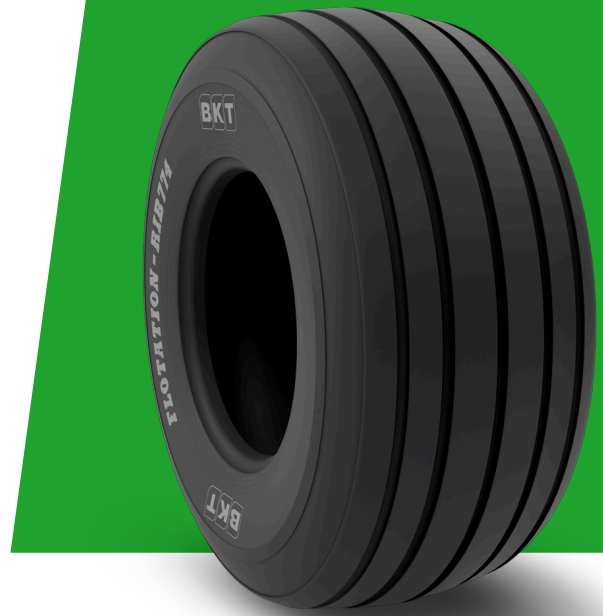

## DIMENSIONES IS STANDARD

<b>SW (MM)</b>	550	<b>RIM REC</b>	AG 16.00
<b>OD (MM)</b>	1240	<b>ECE</b>	E11-106R-005941
<b>SLR (MM)</b>	540	<b>PR</b>	12
<b>RC (MM)</b>	3725		

## LOAD CAPACITY (KG/TIRE)

KM/H / BAR	1.50	1.80	2.10
10 FR	5175	5755	6300
20 FR	4655	5180	5670
30 FR	4140	4605	5040
40 FR	3695	4110	4500
50 FR	3325	3700	4000

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.