


FLOTATION RIB 774

TIRE SIZE	550/60 - 22.5
UM	IS STANDARD
CONSTRUCTION	⊗ BIAS
MACHINERY	КОМБАЙН / ПРИЦЕП / КОМБАЙН / СЕЛЬСКОХОЗЯЙСТВЕННОЕ ОБОРУДОВАНИЕ
VERSION	STANDARD
TIRE TYPE	TL
LI/SS FREE ROLLING	167 A8/163 B

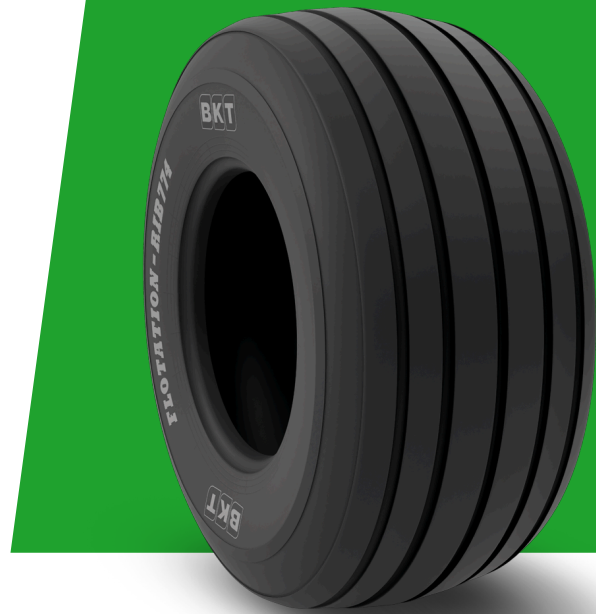

РАЗМЕРЫ IS STANDARD

SW (MM)	550	RIM REC	AG 16.00
OD (MM)	1240	ECE	E11-106R-005942
SLR (MM)	540	PR	16
RC (MM)	3725		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	2.40	2.60	2.80
10 FR	6970	7310	7630
20 FR	6275	6575	6865
30 FR	5580	5845	6105
40 FR	4980	5220	5450
50 FR	4480	4700	4875

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.