


# MINEFORCE

<b>TIRE SIZE</b>	<b>27.00 - 49</b>
<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	⊠ BIAS
<b>MACHINERY</b>	TOMBEREAU RIGIDE
<b>VERSION</b>	CUT RESISTANT
<b>TIRE TYPE</b>	TL

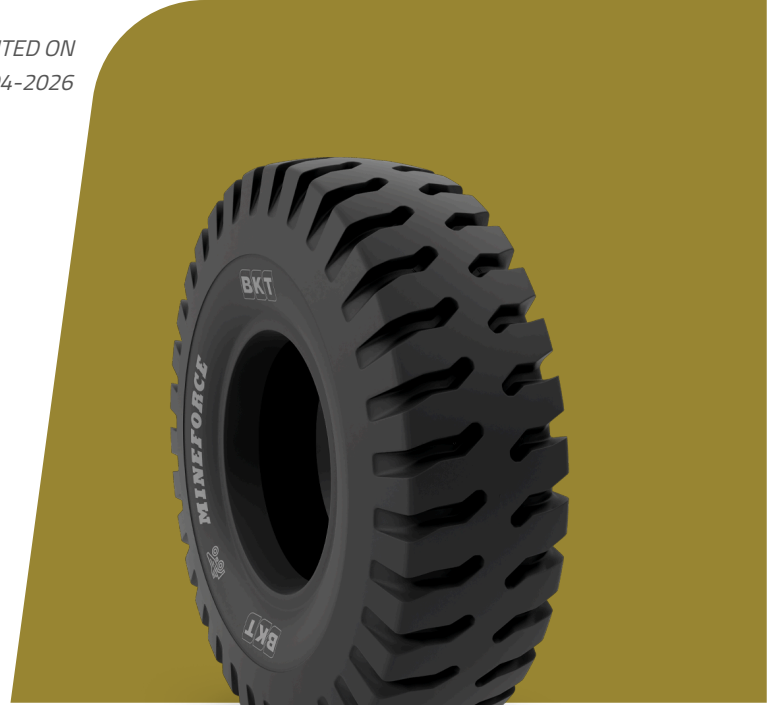

## DIMENSIONS IS STANDARD

<b>OD (MM)</b>	2695	<b>PR</b>	66
<b>SLR (MM)</b>	1253	<b>TRA CODE</b>	E4
<b>RC (MM)</b>	7985		
<b>RIM REC</b>	19.50/4.0		

## LOAD CAPACITY (KG/TIRE)

<b>KM/H / BAR</b>	<b>7.25</b>	<b>10.00</b>
50	29050	-
10	-	50790

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.