


RIB IMPLEMENT (A)

TIRE SIZE	10.0/80 - 12
UM	IS STANDARD
CONSTRUCTION	❖ BIAS
MACHINERY	IMPLEMENT MACHINERY / TRAILER / IMPLEMENTS
VERSION	STANDARD
TIRE TYPE	TL
LI/SS FREE ROLLING	110 A8

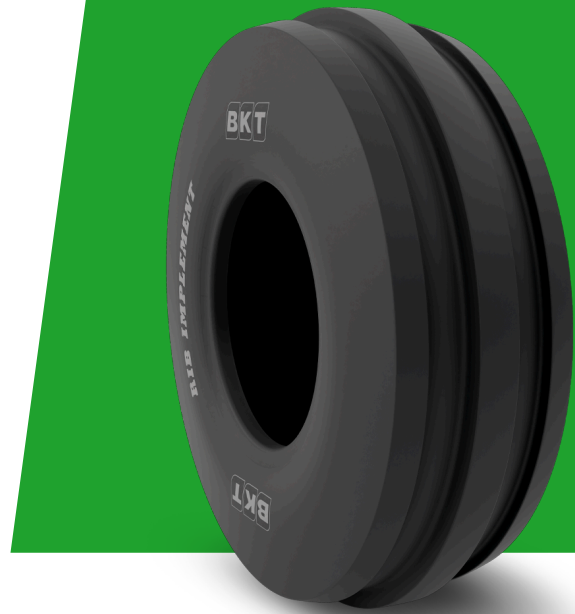

DIMENSIONS IS STANDARD

SW (MM)	264	RIM REC	9.00
OD (MM)	746	RIM ALT	7.0
SLR (MM)	329	ECE	E11-106R-003533
RC (MM)	2186	PR	6

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	2.30
10 FR	1485
25 FR	1260
30 FR	1185
40 FR	1060

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.