


# SM 48 (GK)

|                     |             |
|---------------------|-------------|
| <b>TYRE SIZE</b>    | 11X7.10 -5  |
| <b>UM</b>           | IS STANDARD |
| <b>CONSTRUCTION</b> | BIAS        |
| <b>VERSION</b>      | STANDARD    |
| <b>TL/TT</b>        | TL          |

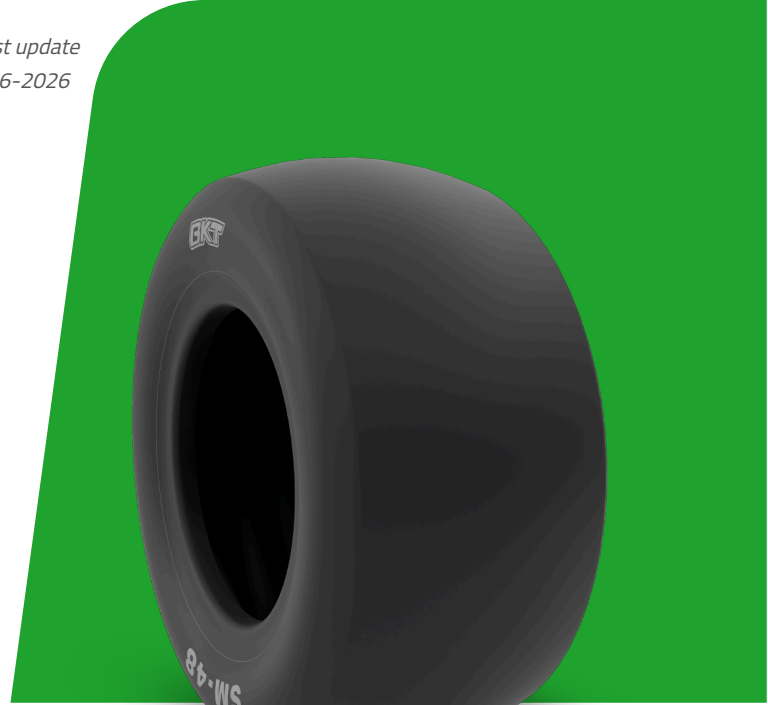

## DIMENSIONS IS STANDARD

|                 |     |                |      |
|-----------------|-----|----------------|------|
| <b>SW (MM)</b>  | 190 | <b>RIM REC</b> | 6.75 |
| <b>OD (MM)</b>  | 295 |                |      |
| <b>SLR (MM)</b> | 0   |                |      |
| <b>RC (MM)</b>  | 0   |                |      |

## LOAD CAPACITY (KG/TYRE)

|                   |      |
|-------------------|------|
| <b>KM/H / BAR</b> | 4.00 |
| -                 | 135  |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.