




IS standard



GROWING TOGETHER

TR 118

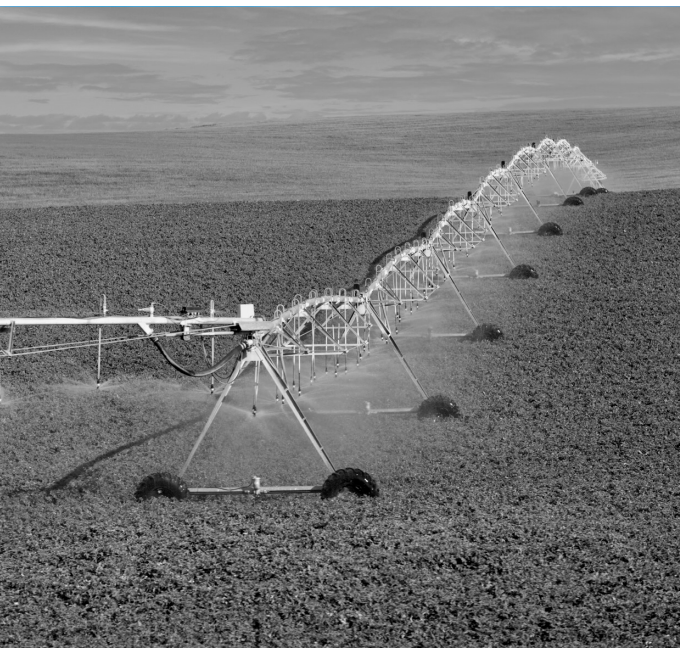

PRODUCT DATA SHEET



Bias



Technologies



Reinforced Carcass

Performance



Durability



TR 118

TR 118 has been engineered for irrigation machinery. TR 118 features a reinforced carcass and a higher number of lugs, which enable a longer service life.

	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
\varnothing 24"	14.9 - 24	W 13	W 12 ; W 11	380	1265	566	3742	STD	8	TL	128 A6

STD: Standard



Tolerances: O.D. \pm 2% - S.W. \pm 2% - RC \pm 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference