


FLOTATION RIB 774

| | |
|---------------------------|--|
| TIRE SIZE | 550/60 - 22.5 |
| UM | IS STANDARD |
| CONSTRUCTION | ❖ BIAS |
| MACHINERY | КОМБАЙН / ПРИЦЕП / КОМБАЙН / СЕЛЬСКОХОЗЯЙСТВЕННОЕ ОБОРУДОВАНИЕ |
| VERSION | STANDARD |
| TIRE TYPE | TL |
| LI/SS FREE ROLLING | 160 A8/156 B |

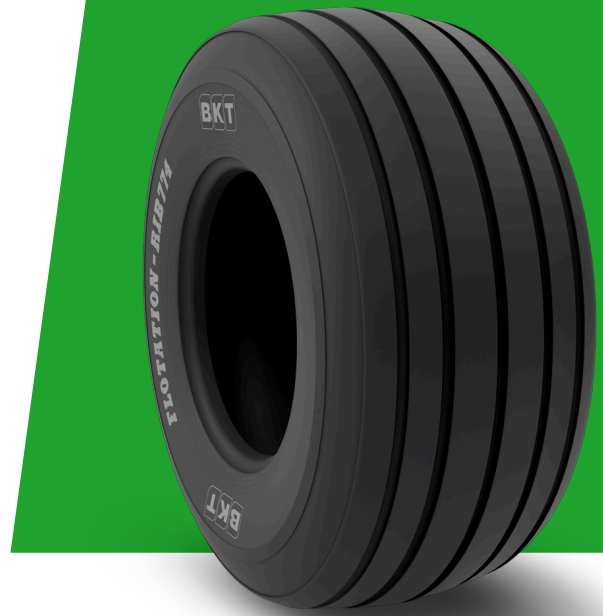

РАЗМЕРЫ IS STANDARD

| | | | |
|-----------------|------|----------------|-----------------|
| SW (MM) | 550 | RIM REC | AG 16.00 |
| OD (MM) | 1240 | ECE | E11-106R-005941 |
| SLR (MM) | 540 | PR | 12 |
| RC (MM) | 3725 | | |

LOAD CAPACITY (KG/TIRE)

| KM/H / BAR | 1.50 | 1.80 | 2.10 |
|------------|------|------|------|
| 10 FR | 5175 | 5755 | 6300 |
| 20 FR | 4655 | 5180 | 5670 |
| 30 FR | 4140 | 4605 | 5040 |
| 40 FR | 3695 | 4110 | 4500 |
| 50 FR | 3325 | 3700 | 4000 |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.