


# SM 48 (GK)

<b>TIRE SIZE</b>	10X4.5 -5
<b>UM</b>	US STANDARD
<b>CONSTRUCTION</b>	BIAS
<b>MACHINERY</b>	GO-KART
<b>VERSIONE</b>	STANDARD
<b>TIRE TYPE</b>	TL

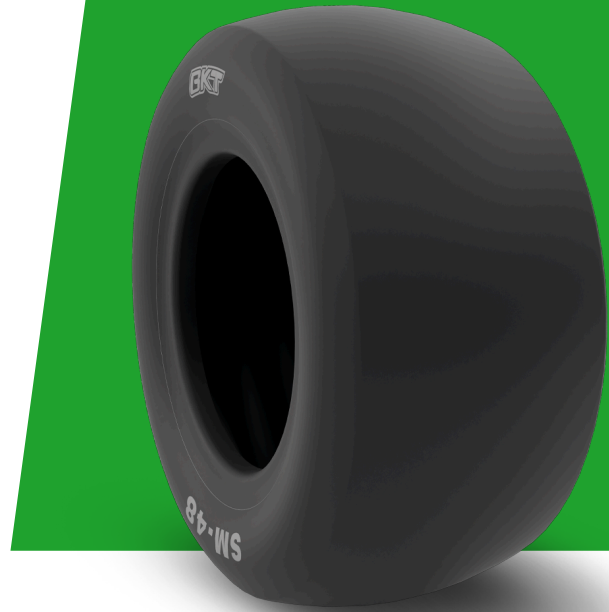

## DIMENSIONI US STANDARD

<b>CODICE USA</b>	94030729	<b>RC (IN)</b>	0
<b>SW (IN)</b>	5.1	<b>RIM REC</b>	4.5
<b>OD (IN)</b>	10.2		
<b>SLR (IN)</b>	0		

## LOAD CAPACITY (LBS/TIRE)

<b>MPH / PSI</b>	<b>58</b>
-	285

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.