


# ROCK GRIP E4

<b>TIRE SIZE</b>	16.00 - 25
<b>UM</b>	US STANDARD
<b>CONSTRUCTION</b>	⊠ BIAS
<b>MACHINERY</b>	AUTOBASCULANTĂ RIGIDĂ
<b>VERSION</b>	STANDARD
<b>TIRE TYPE</b>	TL

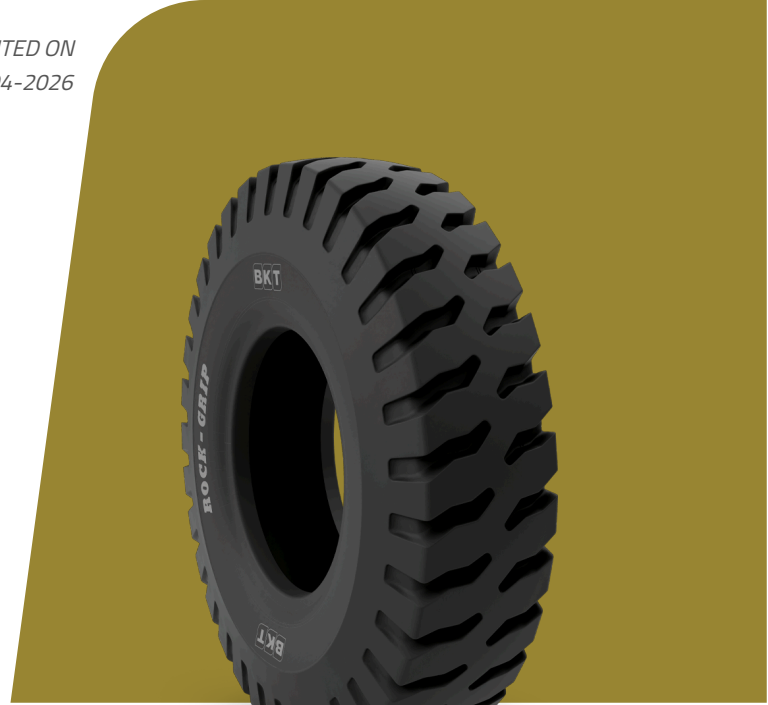

## DIMENSIUNI US STANDARD

<b>USA CODE</b>	94027651	<b>RIM REC</b>	11.25/2.0
<b>OD (IN)</b>	60.0	<b>RIM ALT</b>	13.00/2.0
<b>SLR (IN)</b>	27.5	<b>PR</b>	28
<b>RC (IN)</b>	177.7	<b>TRA CODE</b>	E4

## LOAD CAPACITY (LBS/TIRE)

MPH / PSI	83	109
30	14800	-
5	-	25400

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.