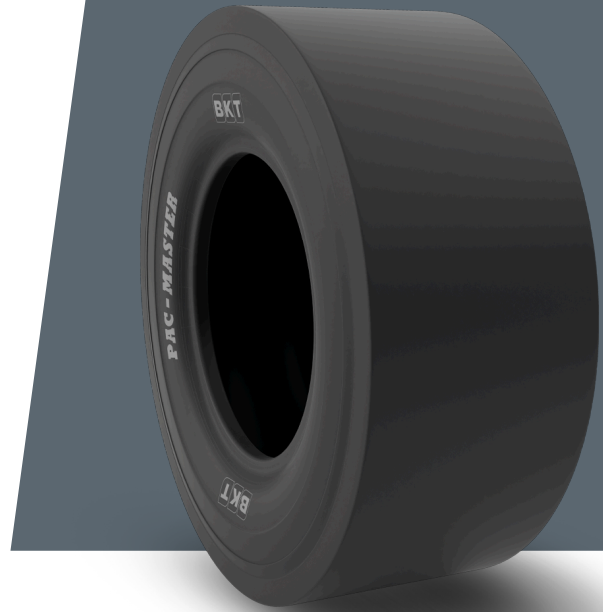


# PAC MASTER

**11.00 - 20**

<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	❖ BIAS
<b>MACHINERY</b>	KOMPAKTÖR
<b>VERSION</b>	SPECIAL
<b>TIRE TYPE</b>	TT

**UNDEFINED IS STANDARD**

<b>SW (MM)</b>	291	<b>RIM REC</b>	8.0
<b>OD (MM)</b>	1070	<b>RIM ALT</b>	8.5
<b>SLR (MM)</b>	494	<b>ECE</b>	E11-106R-003407
<b>RC (MM)</b>	3310	<b>PR</b>	16

**LOAD CAPACITY (KG/TIRE)**

<b>KM/H / BAR</b>	<b>7.25</b>
10	5450
15	4375

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.