
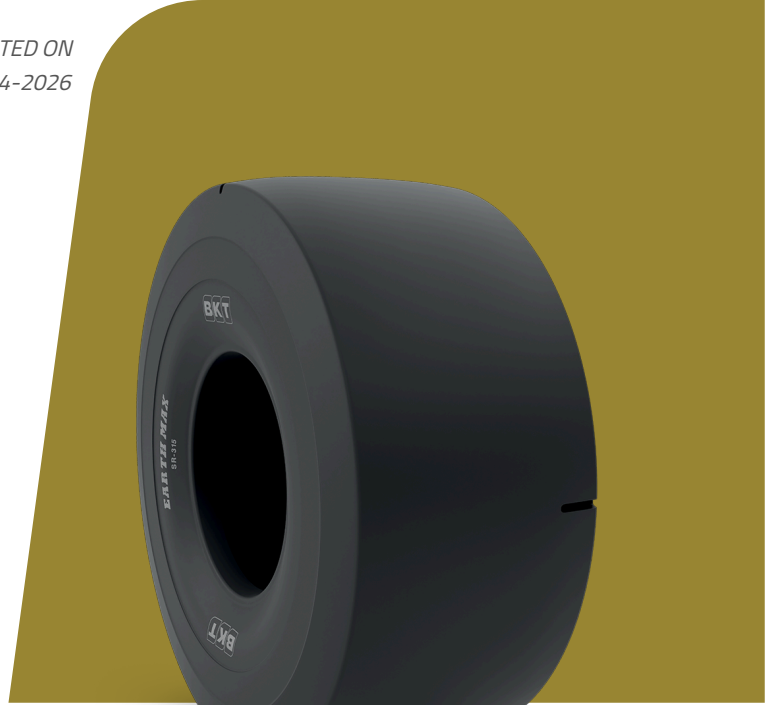


EARTHMAX SR 315

| | |
|---------------------|--|
| TIRE SIZE | 26.5 R 29 |
| UM | IS STANDARD |
| CONSTRUCTION |  RADIAL |
| MACHINERY | LOAD HAUL DUMP |
| VERSION | CUT RESISTANT COMPOUND |
| TIRE TYPE | TL |
| LI/SS | 217 A2 |



DIMENSIONS IS STANDARD

| | | | |
|-----------------|-----------|--------------------|-----|
| OD (MM) | 1865 | TRA CODE | L3S |
| SLR (MM) | 830 | STAR RATING | ★★★ |
| RC (MM) | 5635 | | |
| RIM REC | 22.00/3.0 | | |

LOAD CAPACITY (KG/TIRE)

| KM/H / BAR | 6.75 | 7.00 | 7.25 | 7.50 | 7.75 | 8.00 |
|------------|-------|-------|-------|-------|-------|-------|
| 10 | 20000 | 20600 | 21200 | 21800 | 22400 | 23000 |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.