


LG RIB

13X5.00 - 6

| | |
|---------------------|---|
| UM | IS STANDARD |
| CONSTRUCTION | BIAS |
| MACHINERY | BIÇME MAKINELERİ / KÜÇÜK TRAKTÖR / TRAKTÖR |
| VERSION | ARAMID BELTED |
| TIRE TYPE | TL |

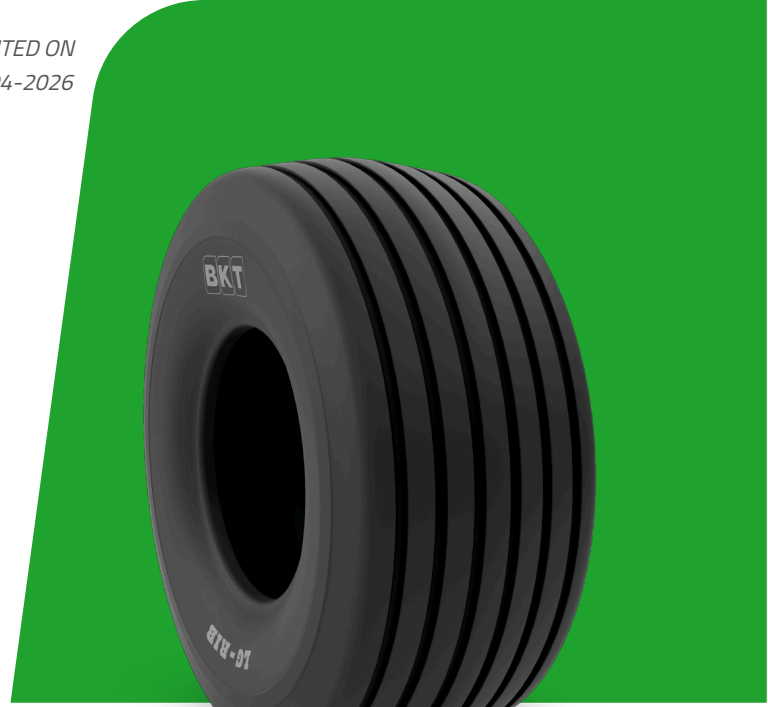

UNDEFINED IS STANDARD

| | | | |
|-----------------|-----|----------------|-----------------|
| SW (MM) | 127 | RIM REC | 3.50 A |
| OD (MM) | 325 | ECE | E11-106R-005221 |
| SLR (MM) | 144 | PR | 6 |
| RC (MM) | 943 | | |

LOAD CAPACITY (KG/TIRE)

| | |
|-------------------|-------------|
| KM/H / BAR | 4.20 |
| 15 | 255 |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.