

AGRIMAX FORCE



AGRIMAX FORCE
RADIAL 1F TECHNOLOGY TIRES

AGRIMAX FORCE



AGRIMAX FORCE the high-end product of BKT is a radial tire specially designed for soil tillage, haulage and harvesting applications with high-power tractors and harvesters. ensuring top performance and efficiency. Thanks to its IF technology, this tire can carry heavy loads with a lower inflating pressure compared to a standard tire reducing soil compaction. AGRIMAX FORCE features a reinforced bead and provides enhanced traction, top self-cleaning properties and fuel economy.



	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	603	1551	694	4654	725	STD
	IF 710/55 R 28 CFO	165 D	DW 25 B	-	716	1493	663	4442	700	STD
Ø30"	IF 620/75 R 30 CFO	169 D	DW 23 B	DW 21 B	650	1703	759	5100	800	STD
	IF 600/70 R 30 CFO	165 D	DW 21 B DW 21 A	DW 20 A DW 20 B	603	1602	708	4800	750	SPL
	IF 710/55 R 30 CFO	166 D	DW 25 B	-	716	1544	686	4616	725	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES		
				
				

Permissible tolerances: 0.0. 2%-S.W. 2%-RC 2.5%-LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference, SRI index

SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
		REC RIM	ALT RIM						
									
IF 600/70 R 30 CFO	165 D	DW 21 B DW 21 A	DW 20 A DW 20 B	603	1602	708	4800	750	STD
IF 710/60 R 30 CFO	168 D	DW 25 B	-	708	1614	714	4814	775	STD
Ø34"	IF 710/60 R 34 CFO	DW 25 B	-	708	1716	763	5126	825	SPL
	IF 710/75 R 34 CFO	DW 25 B	DW 23 B	716	1929	870	5775	900	STD
	IF 650/60 R 34	DW 23 B	DW 21 B	650	1644	746	4954	775	STD
	IF 650/65 R 34 CFO	DW 23 B	DW 20 B	650	1710	764	5078	825	SPL
	IF 600/70 R 34	DW 21 B DW 21 A	DW 20 A DW 20 B	603	1704	757	5070	800	STD
	IF 650/65 R 34 CFO	DW 23 B	DW 20 B	650	1710	764	5078	825	STD
	IF 710/55 R 34 CFO	DW 25 B	-	716	1646	746	4962	775	STD
	IF 710/60 R 34 CFO	DW 25 B	-	708	1716	763	5126	825	STD

STD: STANDARD, SPL: SPECIAL

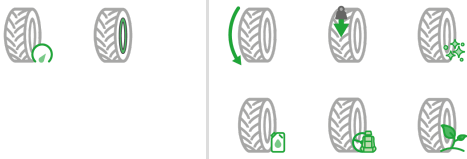
TECHNOLOGIES		PERFORMANCES	
			
			
			
Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index			

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Baikrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

US – 15/07/2026

	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø38"	IF 420/85 R 38	155 D	DW 14 L	DW 15 L	419	1670	780	5017	800	STD
	IF 650/85 R 38 CFO	179 D	DW 23 B	DW 20 B DW 21 B	663	2071	927	6106	975	STD
	IF 800/70 R 38 CFO	184 D	DW 27 B	DW 25 B DW 28 B DW 30 B	794	2085	923	6184	975	STD
	IF 900/60 R 38 CFO	184 D	DW 30 A DW 30 B	TW 31 B	916	2045	904	6107	975	STD
	IF 650/65 R 38 CFO	169 D	DW 23 B	-	650	1830	830	5510	875	STD
	IF 650/75 R 38 CFO	175 D	DW 23 B	DW 21 B	651	1941	866	5802	925	SPL
	IF 380/80 R 38	149 D	W 12	W 11 W 13	380	1573	725	4793	750	STD
	IF 650/75 R 38 CFO	175 D	DW 23 B	DW 21 B	651	1941	866	5802	925	STD
	IF 710/60 R 38	172 D	DW 25 B	-	708	1817	812	5405	875	STD
Ø42"	IF 900/60 R 42 CFO	186 D	DW 30 B	TW 30 B	916	2147	950	6416	1025	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index
			

	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
	IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	716	2133	967	6403	1000	STD
	IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	716	2061	919	6168	975	STD
	IF 800/70 R 42 CFO	192 D	DW 27 B	DW 25 B DW 28 B DW 30 B	794	2150	950	6400	1025	STD
	IF 800/70 R 42 CFO	186 D	DW 27 B	DW 25 B DW 28 B DW 30 B	794	2150	950	6400	1025	STD
	IF 650/85 R 42 CFO	180 D	DW 23 B	-	650	2173	965	6400	1025	STD
	IF 900/50 R 42 CFO	180 D	DW 30 B	TW 30 B	881	1955	872	5830	950	STD
	IF 710/75 R 42 CFO	181 D	DW 25 B	DW 23 B	716	2133	967	6403	1000	SPL
	IF 710/70 R 42 CFO	179 D	DW 25 B	DW 23 B	716	2061	919	6168	975	SPL
Ø46"	IF 750/75 R 46 CFO	186 D	DW 25 B	-	742	2294	1032	6802	1075	STD
Ø50"	IF 480/95 R 50	170 D	DW 16 B	-	479	2170	1002	6574	1025	STD

STD: STANDARD, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tyre width 0.0. outer diameter of the tyre: SLR static radius, RC rolling circumference ; SRI index

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Baikrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

US – 15/07/2026