


SM 48 (GK)

TIRE SIZE	11X7.10 -5
UM	IS STANDARD
CONSTRUCTION	
MACHINERY	GO-KART
VERSION	STANDARD
TL/TT	TL

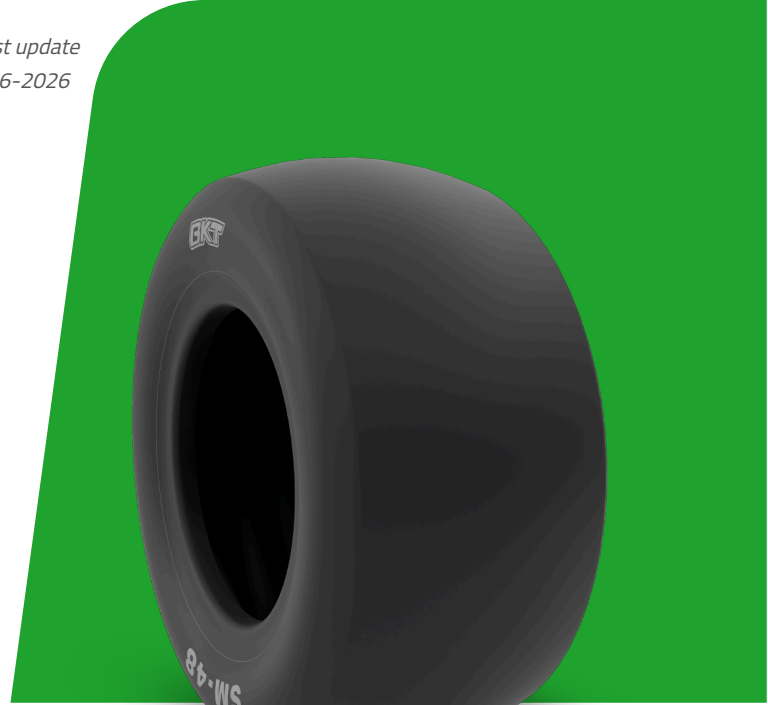

DIMENSIONS IS STANDARD

SW (MM)	190	RIM REC	6.75
OD (MM)	295		
SLR (MM)	0		
RC (MM)	0		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	4.00
-	135

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.