

AGRIMAX RT 765



AGRIMAX
RADIAL TRACTOR TIRES

AGRIMAX RT 765



AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction and comfort on all surfaces at any time. This tire provides great self-cleaning properties and reduced soil compaction. Two sizes are available with steel-belted technology.



SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
		REC RIM	ALT RIM						
									
Ø16"	220/70 R 16	99 A8/B	W 7 W 8	221	715	324	2145	340	STD
	200/70 R 16	94 A8/B	W 6 W 7	197	686	315	2060	330	STD
	240/70 R 16	104 A8/B	W 8 W 8 L W 9 L	244	742	335	2176	350	STD
	280/70 R 16	112 A8/B	W 9 W 8 W 8 L W 10	282	798	356	2370	380	STD
	260/70 R 16	109 A8/B	W 8 W 8 L W 9 L	258	770	346	2283	370	STD

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
 R1W	 180 kg	      	Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø18"	280/70 R 18	114 A8/B	W 9	W 8 W 10	275	849	381	2547	400	STD
Ø20"	360/70 R 20	129 A8/B	W 11	W 10 W 12	357	1042	469	3122	475	STD
	280/70 R 20	116 A8/B	W 9	W 8 W 10	275	900	408	2705	450	STD
	280/70 R 20	116 A8/B	W 9	W 8 W 10	275	900	408	2705	450	SPL
	260/70 R 20	113 A8/B	W 8	9 W 9	258	872	402	2639	425	SPL
	380/70 R 20	132 A8/B	W 12	W 11 W 13	380	1082	482	3213	525	STD
	320/70 R 20	123 A8/B	W 10	W 9 W 11	319	982	445	2938	475	STD
	260/70 R 20	113 A8/B	W 8	9 W 9	258	872	402	2639	425	STD
	300/70 R 20	120 A8/B	W 9	W 10	295	952	428	2854	450	STD
Ø24"	380/70 R 24	125 D	W 12	W 11 W 13	380	1190	538	3560	575	STD

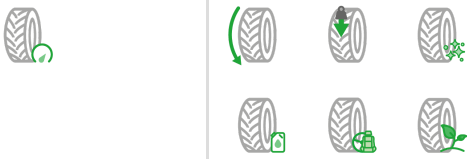
STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			
			
			

Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0. outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
		REC RIM	ALT RIM						
									
360/70 R 24	122 D	W 11	W 10 W 12	357	1152	519	3395	550	STD
420/70 R 24	134 D	W 13	W 12 W 14 L	418	1248	554	3680	600	STD
420/70 R 24	130 D	W 13	W 12 W 14 L	418	1248	554	3680	600	STD
420/70 R 24	134 D	W 13	W 12 W 14 L	418	1248	554	3680	600	SPL
420/70 R 24	130 D	W 13	W 12 W 14 L	418	1248	554	3680	600	SPL
360/70 R 24	122 D	W 11	W 10 W 12	357	1152	519	3395	550	SPL
320/70 R 24	116 D	W 10	W 9 W 11	319	1094	502	3245	525	SPL
320/70 R 24	116 D	W 10	W 9 W 11	319	1094	502	3245	525	STD
480/70 R 24	138 D	W 15 L	W 14 L W 16 L	479	1316	580	3894	625	SPL
380/70 R 24	125 D	W 12	W 11 W 13	380	1190	538	3560	575	SPL

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index
			

All images, texts and graphics contained in this document are the copyright of BKT. Permission is granted to print hard copies of this material. Any other form of reproduction, electronic or otherwise, as well as the application of any changes, partially or entirely, to images, texts, graphs and data is strictly prohibited without prior written permission by BKT. Baikrishna Industries Limited (BKT) reserves itself the right to alter any details contained in the publication without prior notice. BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this document. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly or incidentally from the use of any information contained in this document. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

US – 15/07/2026

	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
	480/70 R 24	138 D	W 15 L	W 14 L W 16 L	479	1316	583	3900	625	STD
Ø28"	360/70 R 28	125 D	W 11	W 10 W 12	357	1251	579	3767	600	SPL
	480/70 R 28	140 D	W 15 L	W 14 L W 16 L	479	1421	634	4185	675	STD
	420/70 R 28	133 D	W 13	W 12 W 14 L	418	1349	604	4020	650	SPL
	600/70 R 28	157 D	DW 18 L	DW 20 B	591	1551	696	4692	725	STD
	420/70 R 28	133 D	W 13	W 12 W 14 L	418	1349	604	4020	650	STD
	360/70 R 28	125 D	W 11	W 10 W 12	357	1251	579	3767	600	STD
	380/70 R 28	127 D	W 12	W 11 W 13	380	1293	586	3883	625	SPL
	380/70 R 28	127 D	W 12	W 11 W 13	380	1293	586	3883	625	STD
	480/70 R 28	140 D	W 15 L	W 14 L W 16 L	479	1421	634	4185	675	SPL

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			
			
			
			
			
			

Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0. outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
Ø30"	420/70 R 30	134 D	W 13	W 12 W 14 L	418	1398	631	4172	675	STD
	600/70 R 30	152 D	DW 20 B	DW 18 L W 18 L	611	1602	711	4774	750	SPL
	600/70 R 30	152 D	DW 20 B	DW 18 L W 18 L	611	1602	711	4774	750	STD
	480/70 R 30	141 D	W 15 L	W 14 L W 16 L	479	1478	659	4372	700	SPL
	480/70 R 30	141 D	W 15 L	W 14 L W 16 L	479	1478	659	4372	700	STD
	420/70 R 30	134 D	W 13	W 12 W 14 L	418	1398	631	4172	675	SPL
Ø34"	520/70 R 34	148 D	W 16 L	W 15 L W 18 L	516	1640	739	4927	775	SPL
	480/70 R 34	149 D	W 15 L	W 14 L W 16 L	479	1580	711	4772	750	SPL
	520/70 R 34	148 D	W 16 L	W 15 L W 18 L	516	1640	739	4927	775	STD
	480/70 R 34	149 D	W 15 L	W 14 L W 16 L	479	1580	711	4772	750	STD

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
 R1W	 D	 180 kg	

Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0. outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

	SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
			REC RIM	ALT RIM						
										
	480/70 R 34	155 D	W 15 L	W 14 L W 16 L	479	1580	728	4788	750	SPL
	480/70 R 34	155 D	W 15 L	W 14 L W 16 L	479	1580	728	4788	750	STD
Ø38"	580/70 R 38	180 D	W 18 L	DW 18 L DD 18 L	577	1827	821	5505	875	SB
	480/70 R 38	145 D	W 15 L	W 14 L W 16 L	479	1681	764	5055	800	SPL
	710/70 R 38	175 D 178 A8	DW 23 B	-	716	1959	859	5751	925	SPL
	650/75 R 38	169 D	DW 21 B	DW 20 B DW 23 B	655	1941	874	5820	925	STD
	710/70 R 38	175 D 178 A8	DW 23 B	-	716	1959	859	5751	925	STD
	710/70 R 38	166 D	DW 23 B	-	716	1959	859	5751	925	SPL
	480/70 R 38	145 D	W 15 L	W 14 L W 16 L	479	1681	764	5055	800	STD
	620/70 R 38	170 D	DW 20 B	DW 18 L W 18 L	625	1833	828	5591	875	STD

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			
			
			

Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0. outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
		REC RIM	ALT RIM						
									
520/70 R 38	150 D	W 16 L	W 15 L W 18 L	516	1749	793	5300	825	STD
620/70 R 38	170 D	DW 20 B	DW 18 L W 18 L	625	1833	828	5591	875	SPL
520/70 R 38	150 D	W 16 L	W 15 L W 18 L	516	1749	793	5300	825	SPL
580/70 R 38	155 D	W 18 L	-	577	1827	821	5471	875	SPL
580/70 R 38	155 D	W 18 L	-	577	1827	821	5471	875	STD
Ø42"	620/70 R 42	160 D	DW 20 B DW 18 L	625	1935	876	5742	925	STD
	620/70 R 42	160 D	DW 20 B DW 18 L	625	1935	876	5742	925	SPL
	710/70 R 42	176 D 179 AB	DW 23 B DW 25 B	716	2061	922	6174	975	SPL
	620/70 R 42	166 D	DW 20 B DW 18 L	625	1935	876	5801	925	SPL
	650/75 R 42	170 D	DW21B DW20B DW23B	655	2043	916	6147	975	STD

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			
D		180 kg	

Permissible tolerances: 0.0. 2%–S.W. 2%–RC 2.5%–LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index

SIZE	LI/SS	RIM		SW (mm)	OD (mm)	SLR (mm)	RC (mm)	SRI index	VERSION
		REC RIM	ALT RIM						
									
710/70 R 42	176 D 179 A8	DW 23 B	DW 25 B	716	2061	922	6174	975	STD
710/70 R 42	173 D 176 A8	DW 23 B	DW 25 B	716	2061	922	6174	975	STD
620/70 R 42	173 D	DW 20 B	DW 18 L	625	1935	876	5804	925	STD
620/70 R 42	173 D	DW 20 B	DW 18 L	625	1935	876	5804	925	SPL
620/70 R 42	166 D	DW 20 B	DW 18 L	625	1935	876	5801	925	STD
Ø46"	620/70 R 46	DW 20 B	-	625	2036	924	6106	975	STD
	620/70 R 46	DW 20 B	-	625	2036	924	6106	975	SPL

STD: STANDARD, SB: STEEL BELTED, SPL: SPECIAL

TECHNOLOGIES		PERFORMANCES	
			
			
D	180 kg		

Permissible tolerances: 0.0. 2%-S.W. 2%-RC 2.5%-LI/SS load/speed index, S.W. tire width 0.0, outer diameter of the tire: SLR static radius, RC rolling circumference ; SRI index