


# SM 48 (GK)

<b>TYRE SIZE</b>	10X4.5 - 5
<b>UM</b>	IS STANDARD
<b>CONSTRUCTION</b>	▣ BIAS
<b>MACHINERY</b>	GO-KART
<b>VERSION</b>	STANDARD
<b>TYRE TYPE</b>	TL

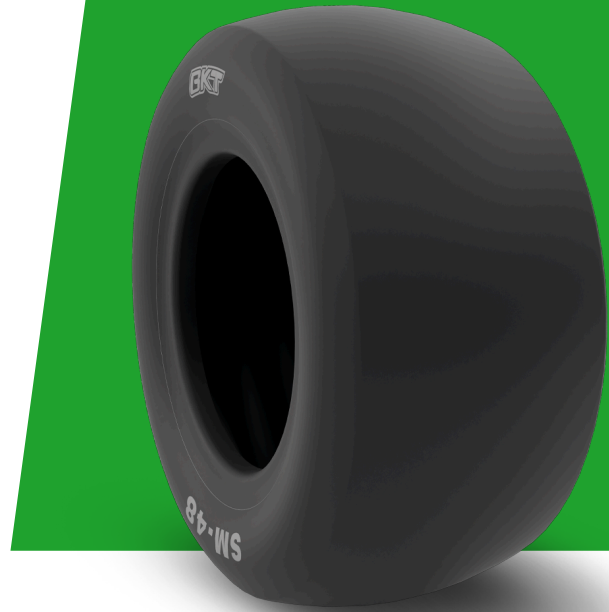

## DIMENSIONS IS STANDARD

<b>SW (MM)</b>	130
<b>OD (MM)</b>	260
<b>RIM REC</b>	4.5

## LOAD CAPACITY (KG/TYRE)

<b>KM/H / BAR</b>	<b>4.00</b>
-	130

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.