


SM 54 SUPER IND-4S

TIRE SIZE	18.00 - 25
UM	IS STANDARD
CONSTRUCTION	BIAS
MACHINERY	STIVUITOR DE CONTAINERE
VERSION	INDUSTRIAL
TIRE TYPE	TL

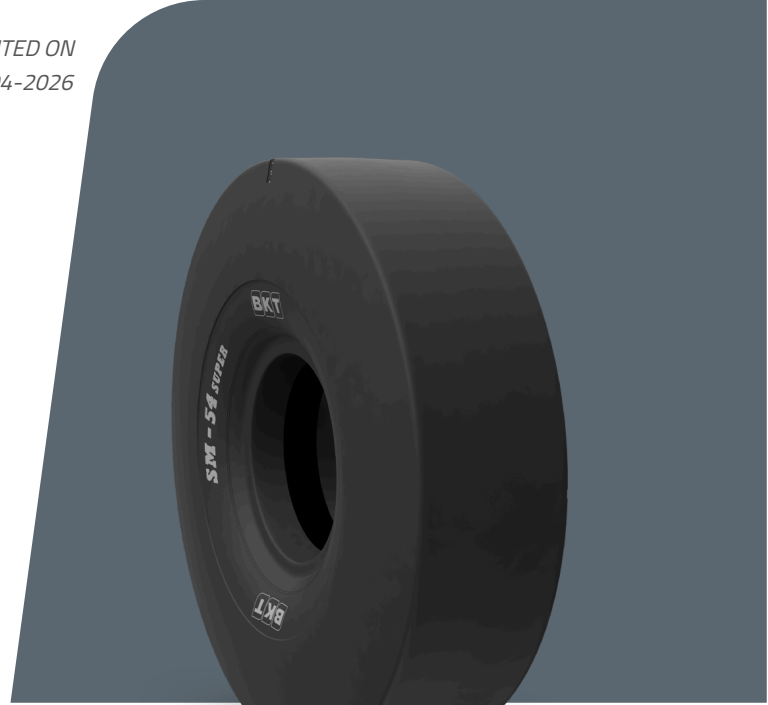

DIMENSIUNI IS STANDARD

OD (MM)	1671	RIM ALT	15.00/2.5
SLR (MM)	759	PR	40
RC (MM)	5040	TRA CODE	IND-4S
RIM REC	13.00/2.5		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	10.00
10	22950

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.