
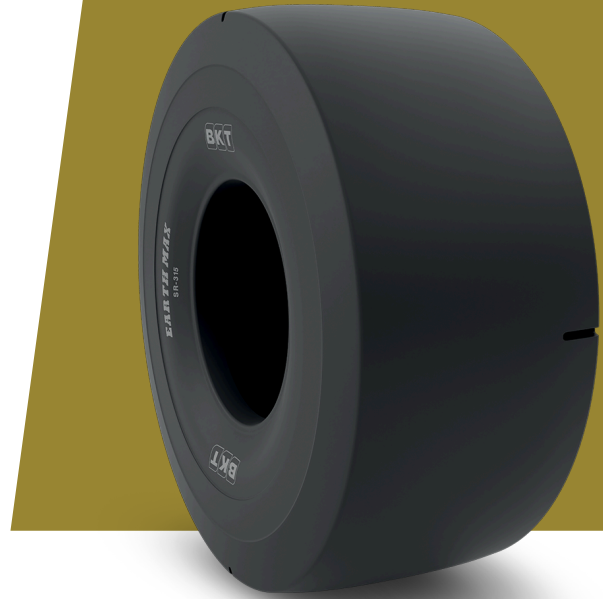


# EARTHMAX SR 315

<b>TIRE SIZE</b>	15.5 R 25
<b>UM</b>	US STANDARD
<b>CONSTRUCTION</b>	 RADIAL
<b>MACHINERY</b>	BASCULARE ÎNCĂRCĂTURI (LHD)
<b>VERSION</b>	CUT RESISTANT COMPOUND
<b>TIRE TYPE</b>	TL
<b>LI/SS</b>	182 A2



## DIMENSIUNI US STANDARD

<b>USA CODE</b>	94515257	<b>RIM REC</b>	12.00/1.3
<b>OD (IN)</b>	49.8	<b>TRA CODE</b>	L3S
<b>SLR (IN)</b>	22.3	<b>STAR RATING</b>	★★★
<b>RC (IN)</b>	150.5		

## LOAD CAPACITY (LBS/TIRE)

<b>MPH / PSI</b>	<b>116</b>
5	18700

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.