


POWER TRAX HD SMOOTH

TIRE SIZE	6.00 - 20
UM	US STANDARD
CONSTRUCTION	BIAS
MACHINERY	MOVIMENTATORE PER CONTAINER / CARRELLO ELEVATORE
VERSIONE	STANDARD
TIRE TYPE	TT

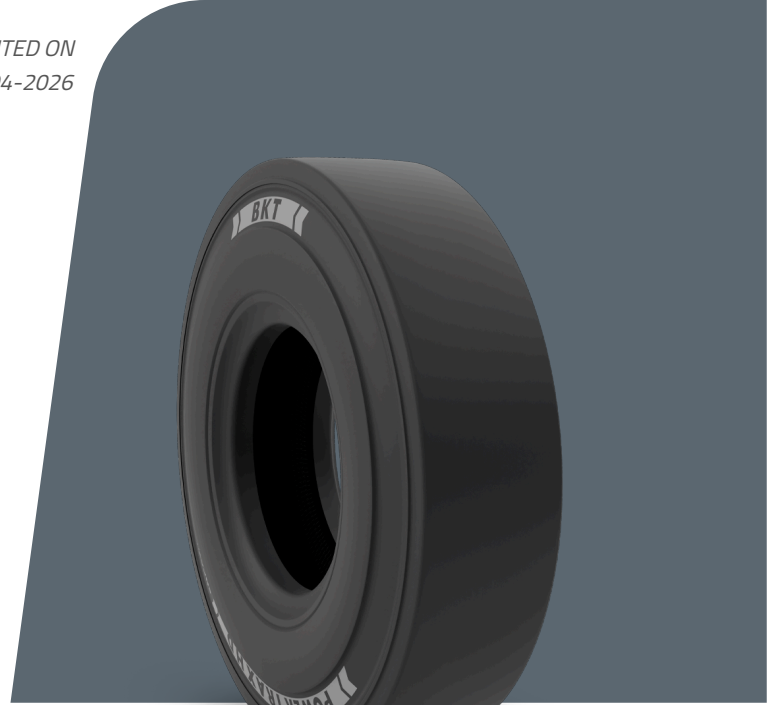

DIMENSIONI US STANDARD

CODICE USA	94062997	RIM ALT	9.0
SW (IN)	12.6	PR	28
OD (IN)	45.3		
RIM REC	8.50		

LOAD CAPACITY (LBS/TIRE)

MPH / PSI	145
15 LOAD WHEEL	20920
15 STEER WHEEL	16095
5 OTHER VEHICLES	20920
15 OTHER VEHICLES	16095
STATIC SIDE LOADER	24305

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.